

Routing Basics

ISP/IXP Workshops

Routing Concepts

Cisco.com

- **IPv4**
- **Routing**
- **Forwarding**
- **Some definitions**
- **Policy options**
- **Routing Protocols**

- **Internet uses IPv4**
addresses are 32 bits long
range from 1.0.0.0 to 223.255.255.255
0.0.0.0 to 0.255.255.255 and 224.0.0.0 to 255.255.255.255 have “special” uses
- **IPv4 address has a network portion and a host portion**

IPv4 address format

Cisco.com

- **Address and subnet mask**

written as

12.34.56.78 255.255.255.0 or

12.34.56.78/24

mask represents the number of network bits in the 32 bit address

the remaining bits are the host bits

What does a router do?

Cisco.com



A day in a life of a router

Cisco.com

find path

**forward packet, forward packet, forward
packet, forward packet...**

find alternate path

**forward packet, forward packet, forward
packet, forward packet...**


repeat until powered off



Routing versus Forwarding

Cisco.com

- **Routing = building maps and giving directions**
- **Forwarding = moving packets between interfaces according to the “directions”**

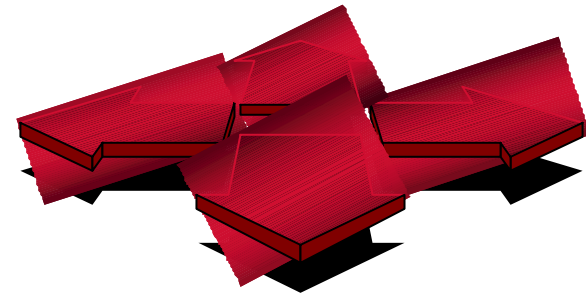

IP Routing – finding the path

Cisco.com

- **Path derived from information received from a routing protocol**
- **Several alternative paths may exist**
best next hop stored in **forwarding** table
- **Decisions are updated periodically or as topology changes (event driven)**
- **Decisions are based on:**
topology, policies and metrics (hop count, filtering, delay, bandwidth, etc.)

IP route lookup

Cisco.com

- **Based on destination IP packet**
- **“longest match” routing**


more specific prefix preferred over less specific prefix

example: packet with destination of 10.1.1.1/32 is sent to the router announcing 10.1/16 rather than the router announcing 10/8.

IP route lookup

Cisco.com


- Based on destination IP packet

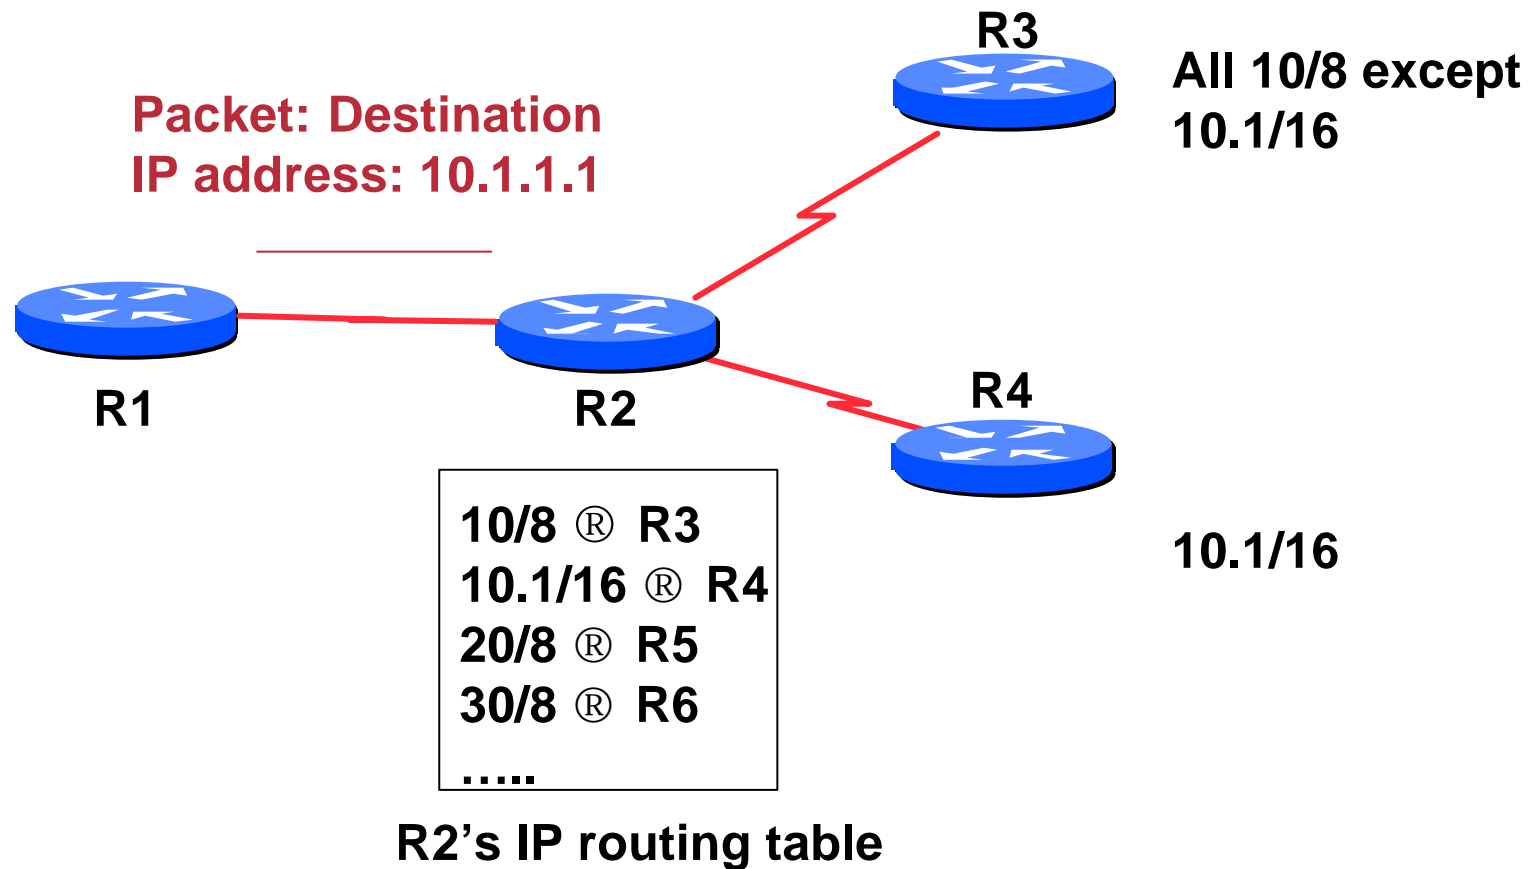

IP route lookup: Longest match routing

Cisco.com


- Based on destination IP packet

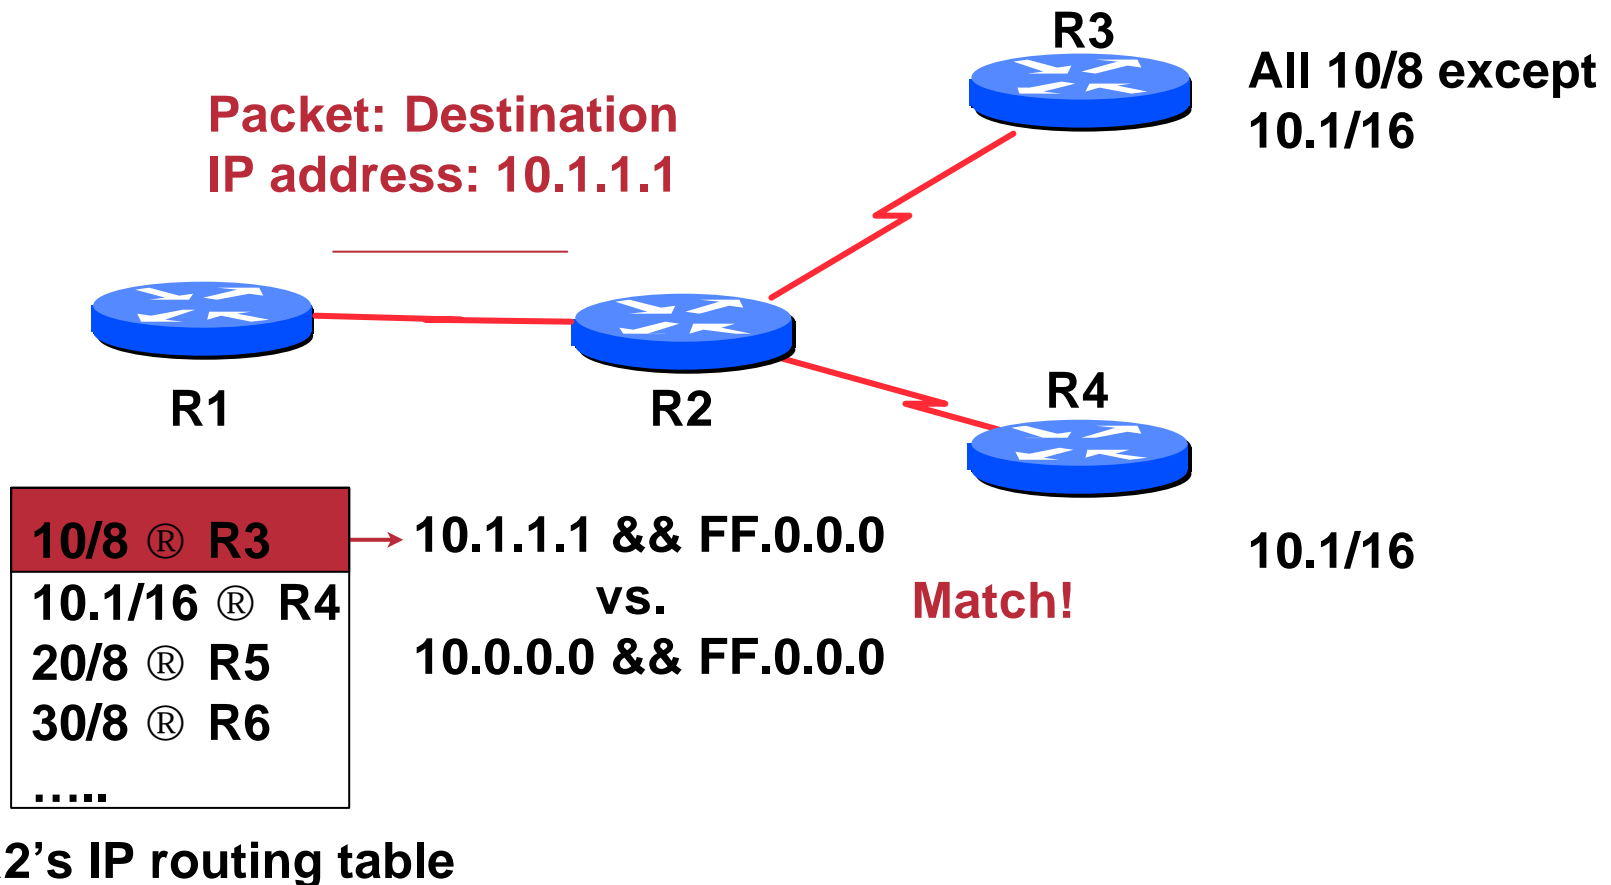

IP route lookup: Longest match routing

Cisco.com

- Based on destination IP packet

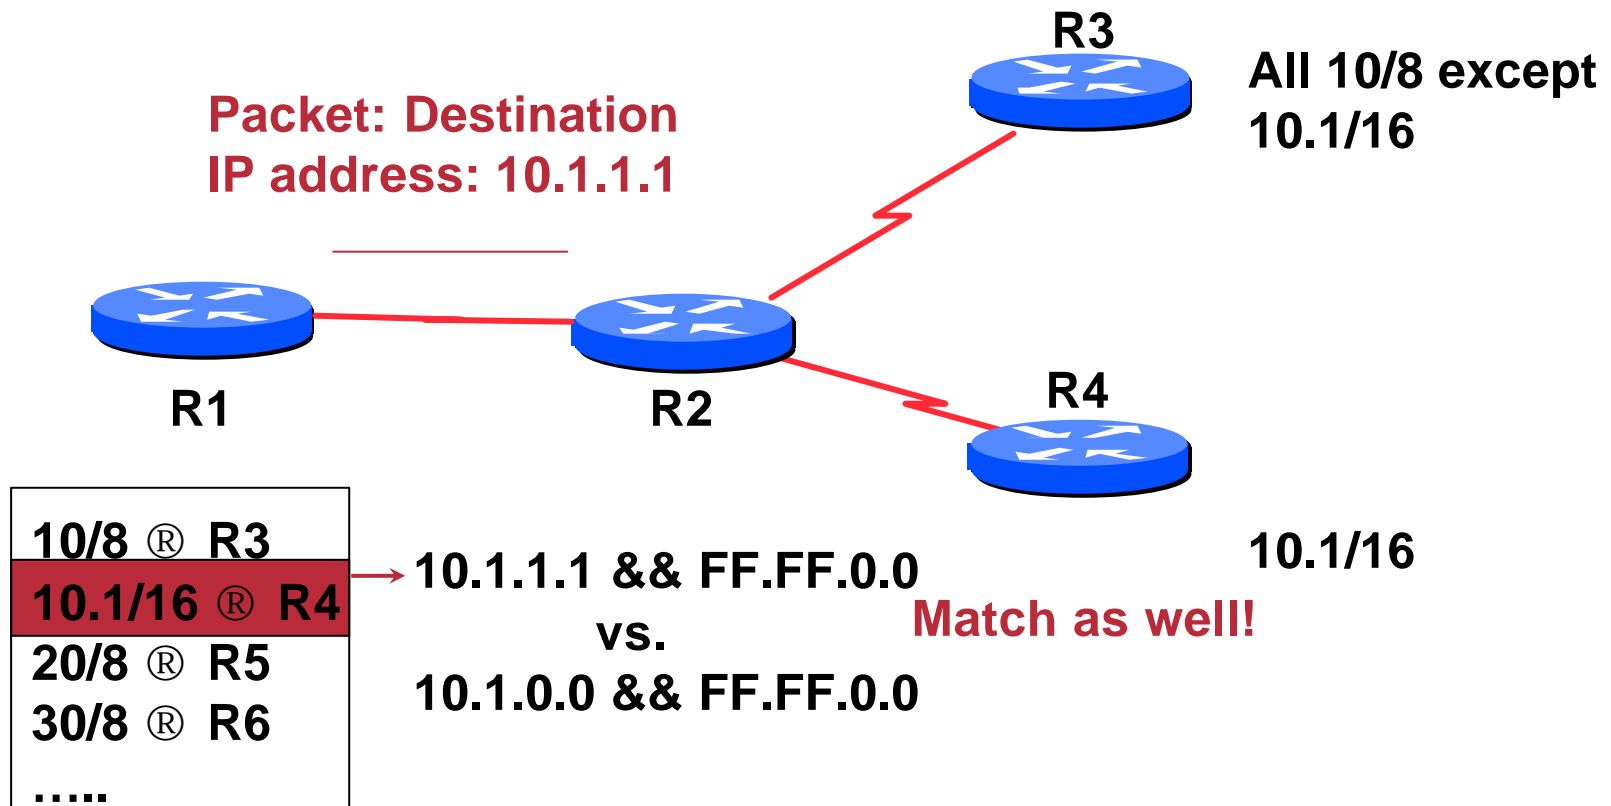


R2's IP routing table

IP route lookup: Longest match routing

Cisco.com

- Based on destination IP packet

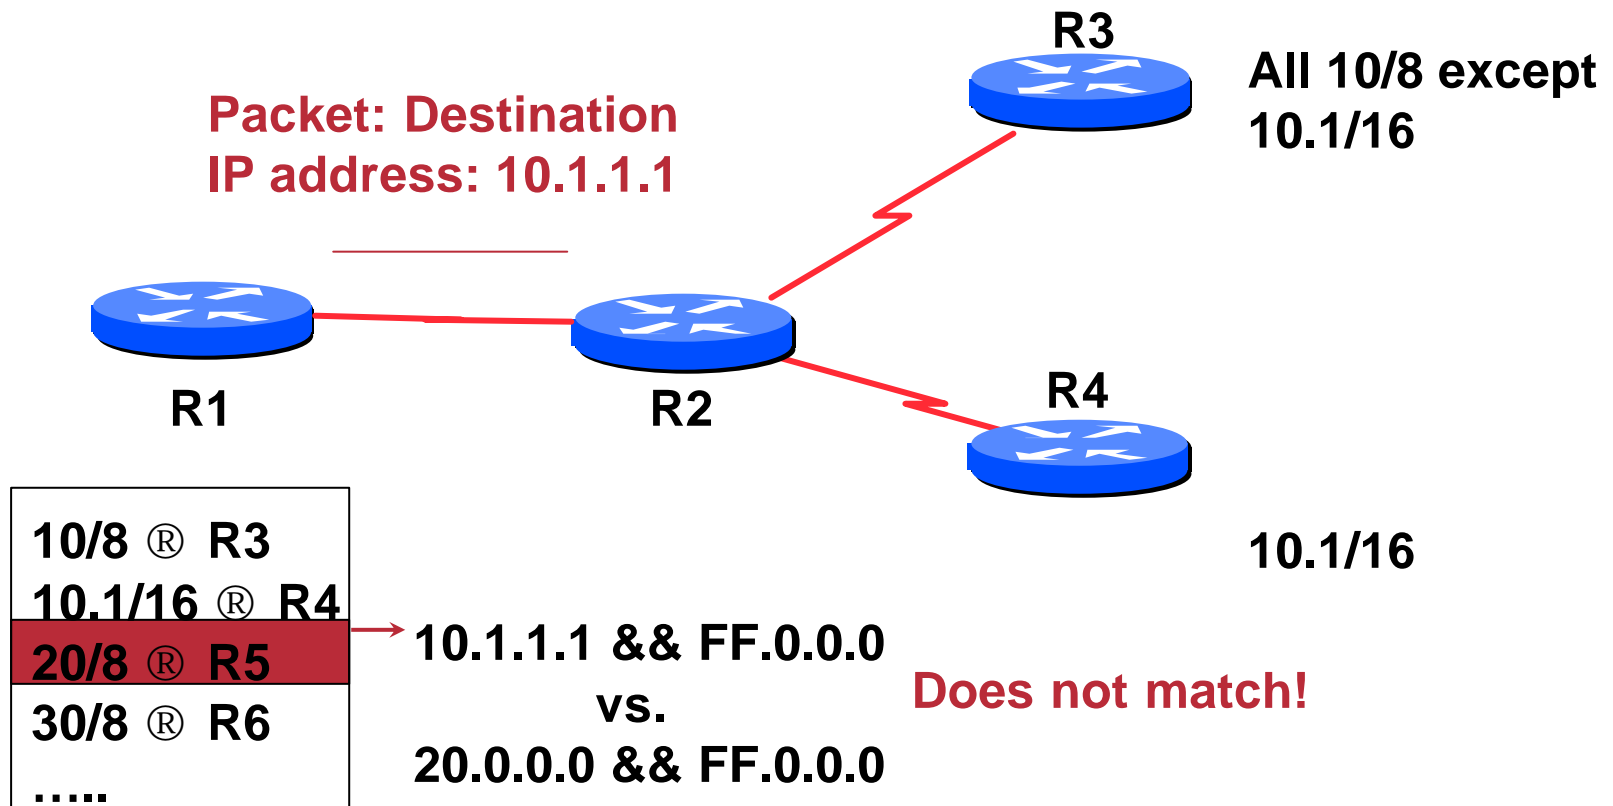


R2's IP routing table

IP route lookup: Longest match routing

Cisco.com


- Based on destination IP packet

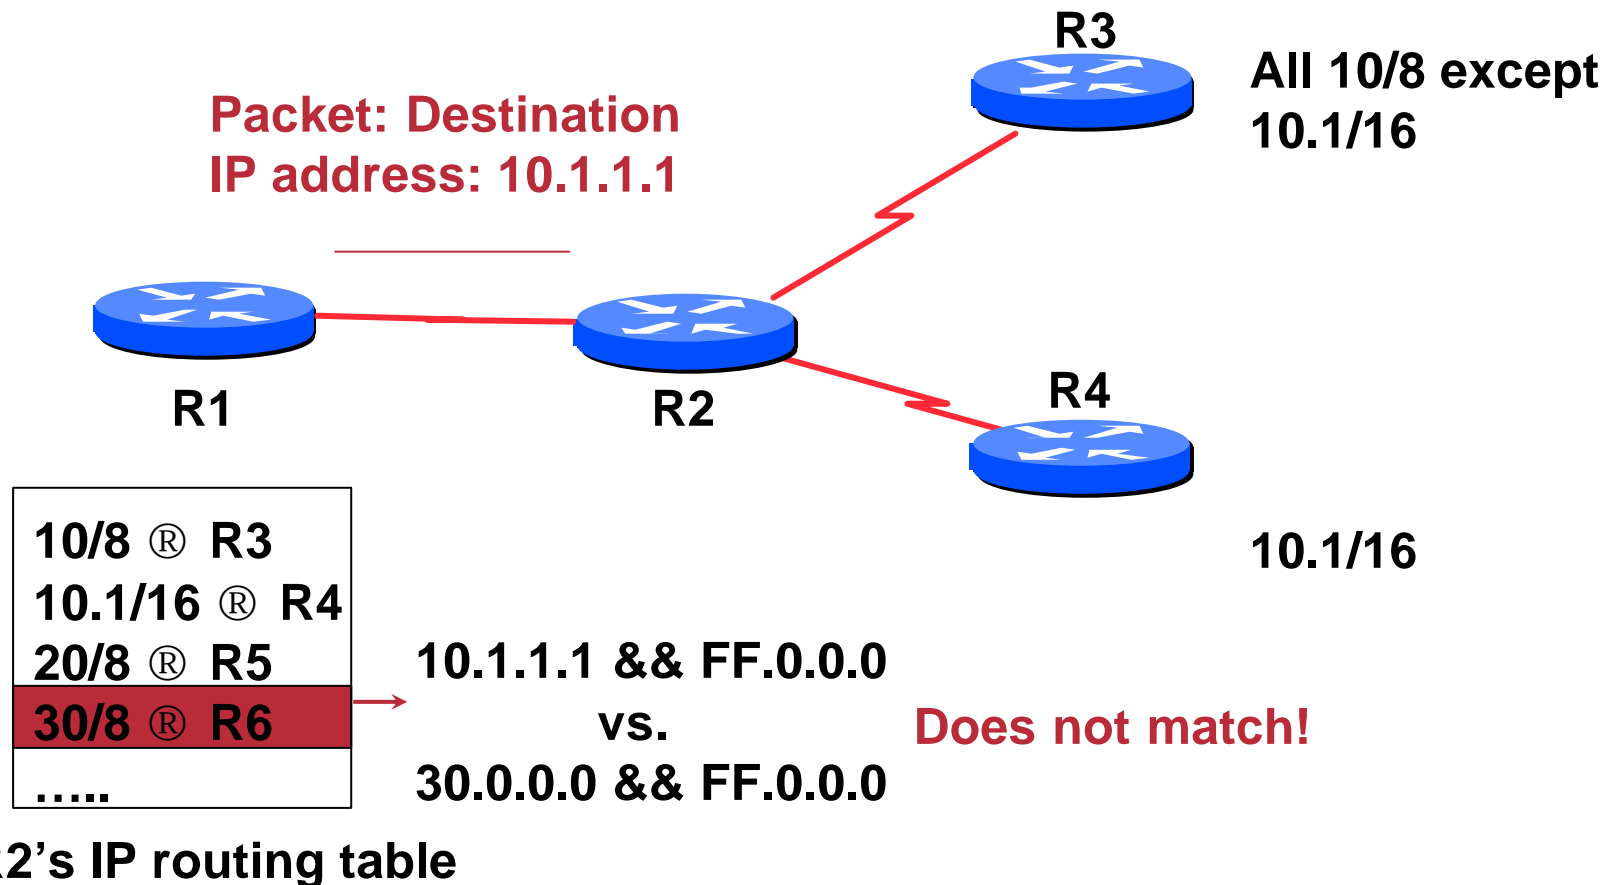

IP route lookup: Longest match routing

Cisco.com

- Based on destination IP packet

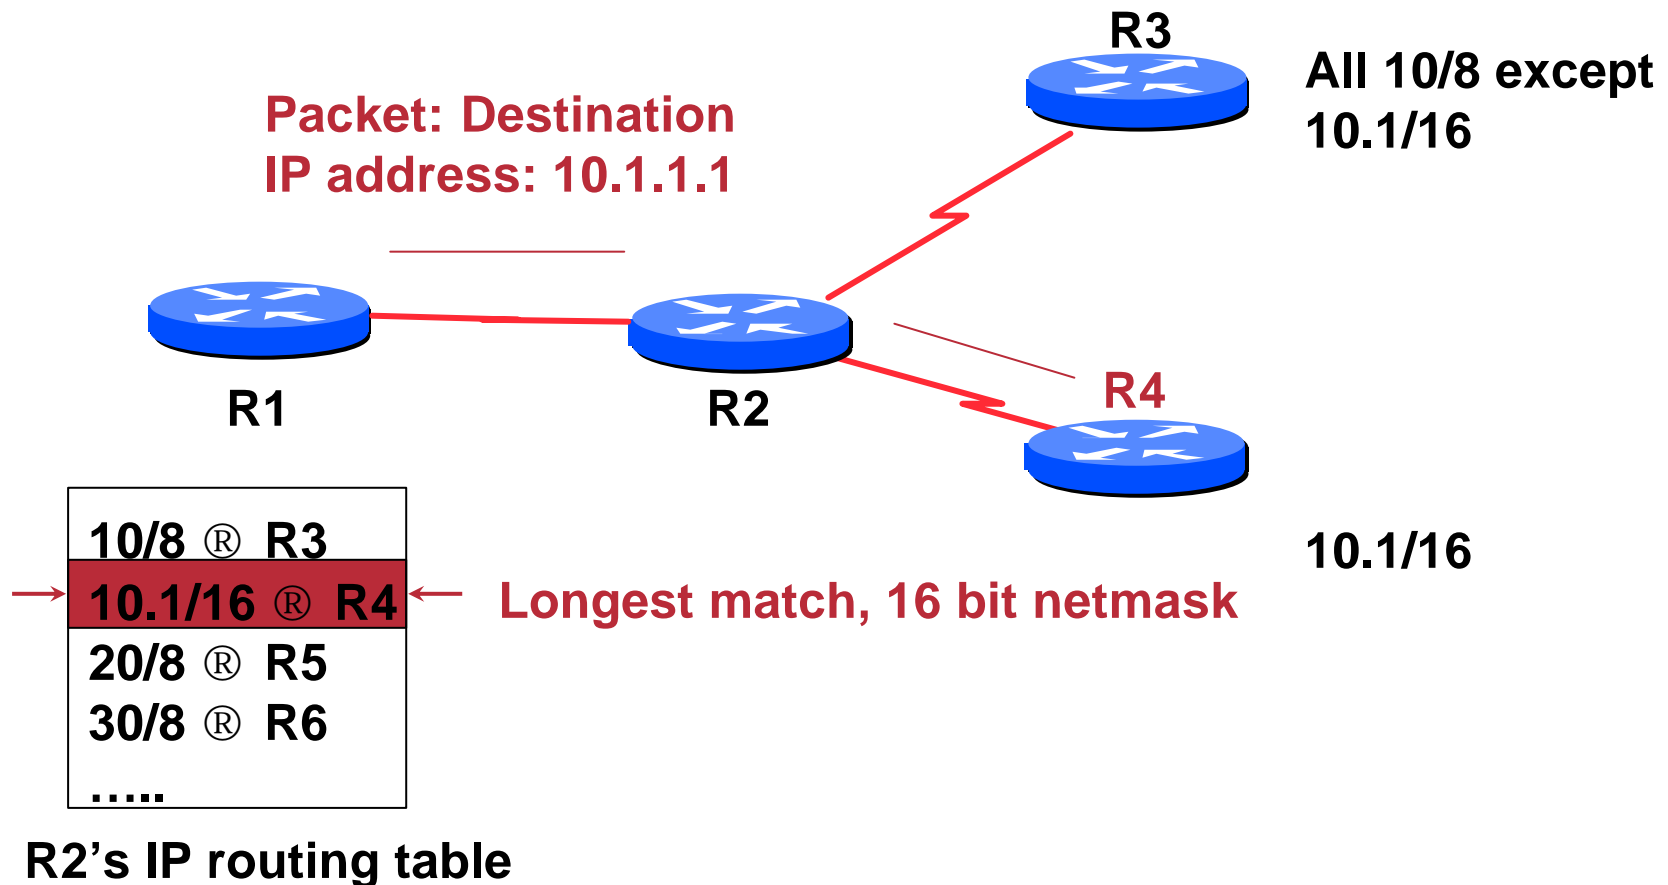


IP Forwarding

Cisco.com

- **Router makes decision on which interface a packet is sent to**
- **Forwarding table populated by routing process**
- **Forwarding decisions:**
 - destination address**
 - class of service (fair queuing, precedence, others)**
 - local requirements (packet filtering)**
- **Can be aided by special hardware**

Routing Tables Feed the Forwarding Table

Cisco.com

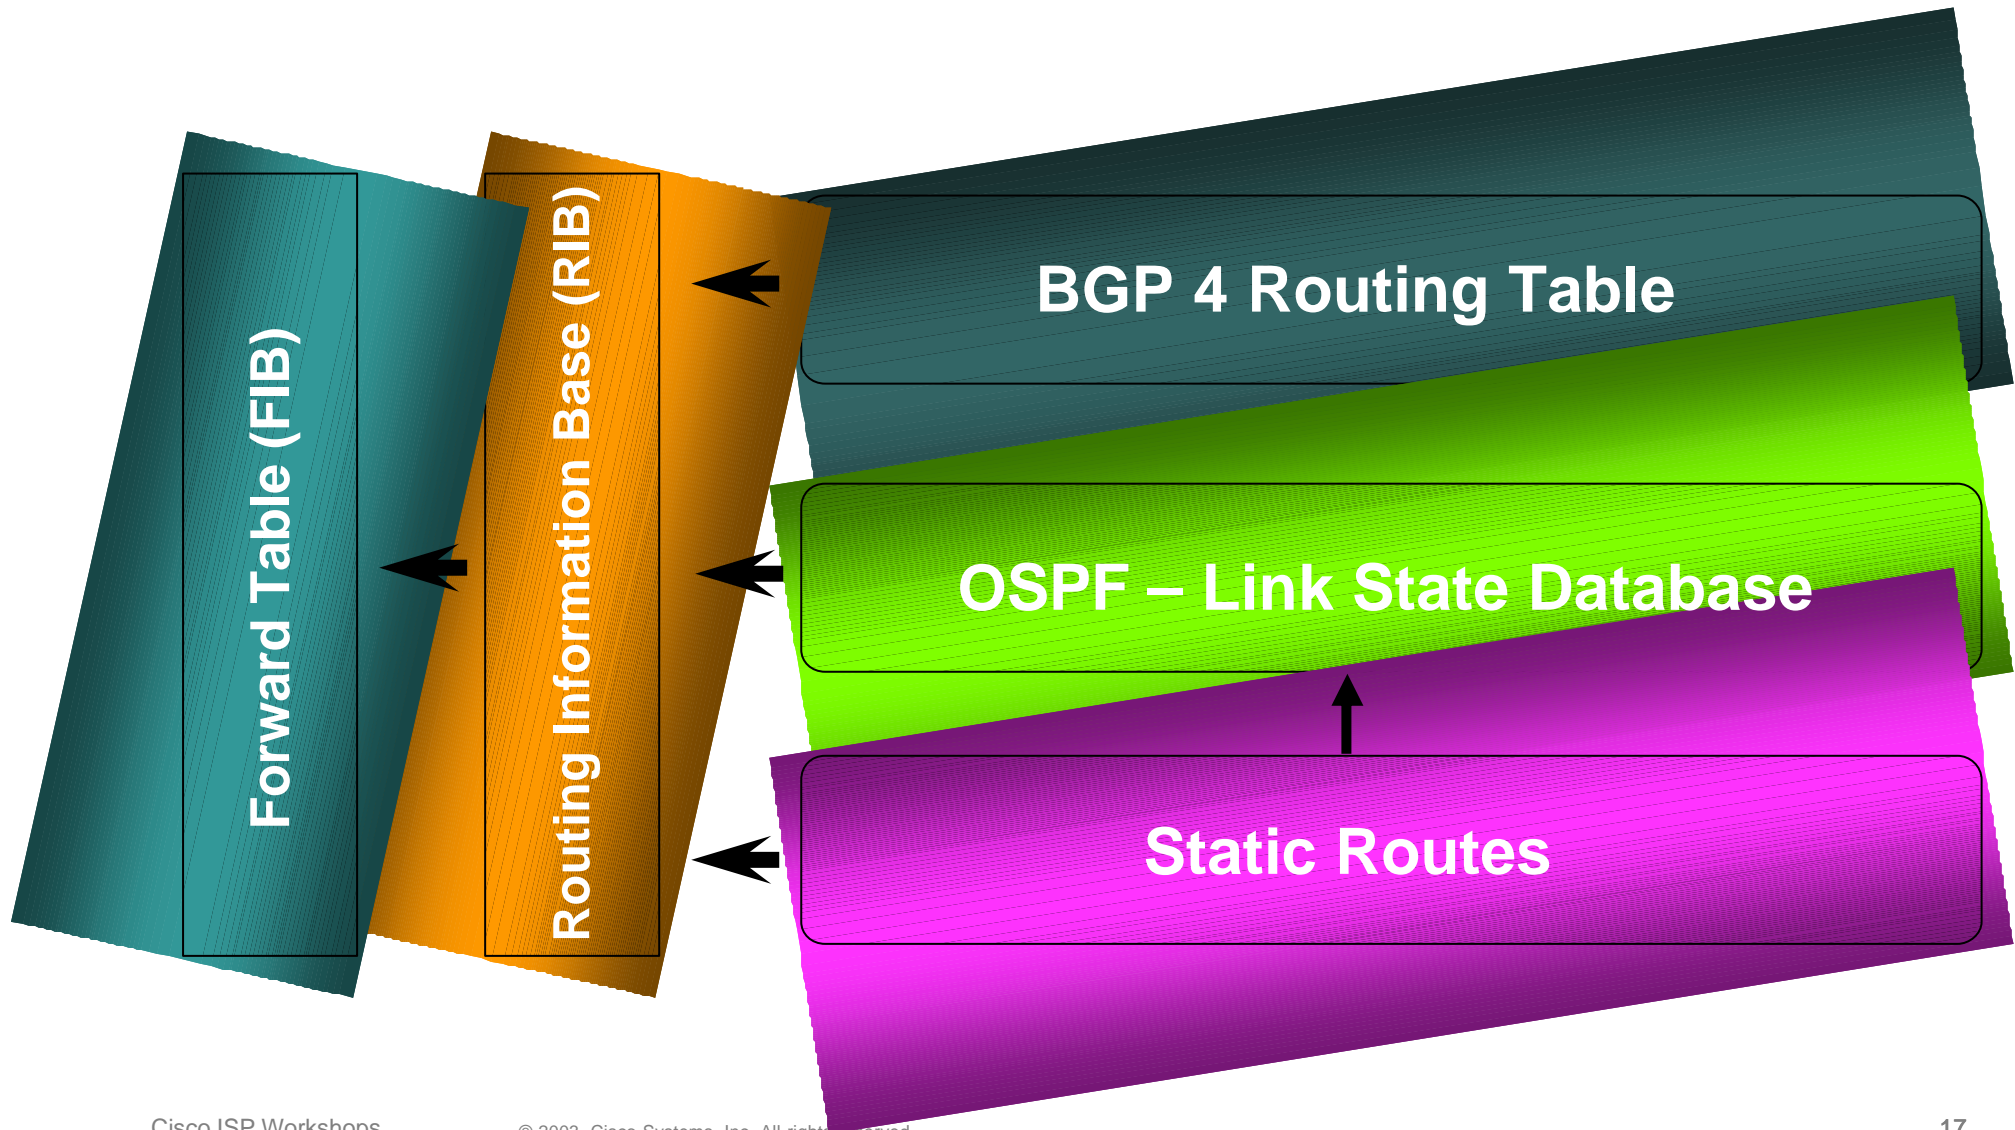

Explicit versus Default routing

Cisco.com

- **Default:**
 - simple, cheap (cycles, memory, bandwidth)**
 - low granularity (metric games)**
- **Explicit (default free zone)**
 - high overhead, complex, high cost, high granularity**
- **Hybrid**
 - minimise overhead**
 - provide useful granularity**
 - requires some filtering knowledge**

Egress Traffic

Cisco.com

- **How packets leave your network**
- **Egress traffic depends on:**
 - route availability (what others send you)**
 - route acceptance (what you accept from others)**
 - policy and tuning (what you do with routes from others)**
 - Peering and transit agreements**


Ingress Traffic

Cisco.com

- **How packets get to your network and your customers' networks**
- **Ingress traffic depends on:**
 - what information you send and to whom**
 - based on your addressing and AS's**
 - based on others' policy (what they accept from you and what they do with it)**

Autonomous System (AS)

Cisco.com

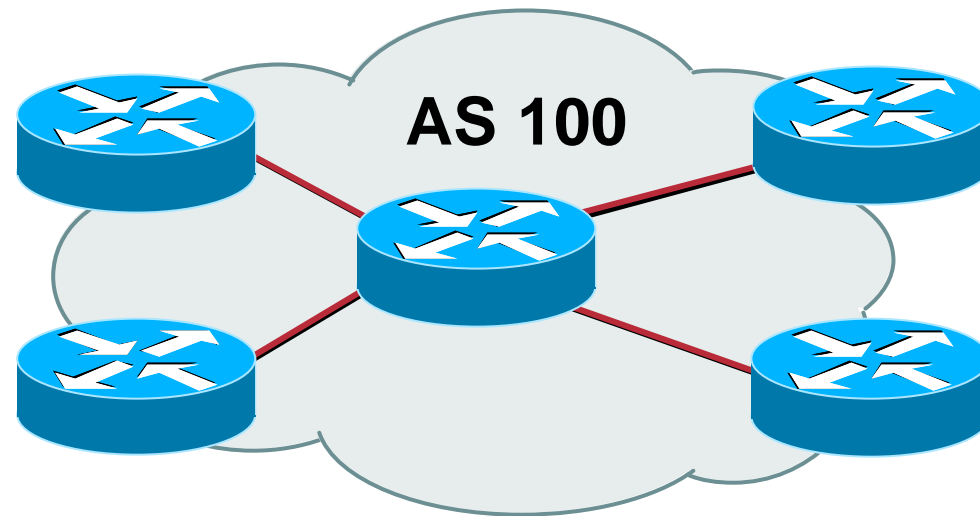

- **Collection of networks with same routing policy**
- **Single routing protocol**
- **Usually under single ownership, trust and administrative control**

Definition of terms

Cisco.com

- **Neighbours**

AS's which directly exchange routing information

Routers which exchange routing information

- **Announce**

send routing information to a neighbour

- **Accept**

receive and use routing information sent by a neighbour

- **Originate**


insert routing information into external announcements (usually as a result of the IGP)

- **Peers**

routers in neighbouring AS's or within one AS which exchange routing and policy information

Routing flow and packet flow

Cisco.com

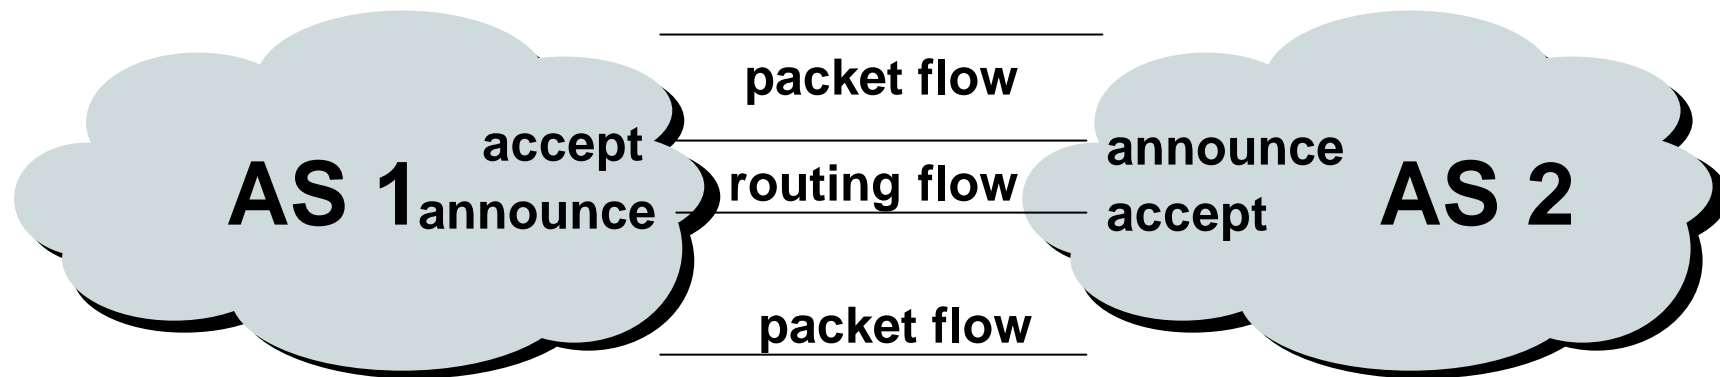

For networks in AS1 and AS2 to communicate:

AS1 must announce to AS2

AS2 must accept from AS1

AS2 must announce to AS1

AS1 must accept from AS2

Routing flow and Traffic flow

Cisco.com


- **Traffic flow is always in the opposite direction of the flow of Routing information**

Filtering outgoing routing information inhibits traffic flow inbound

Filtering inbound routing information inhibits traffic flow outbound

Routing Flow/Packet Flow: With multiple ASes

Cisco.com

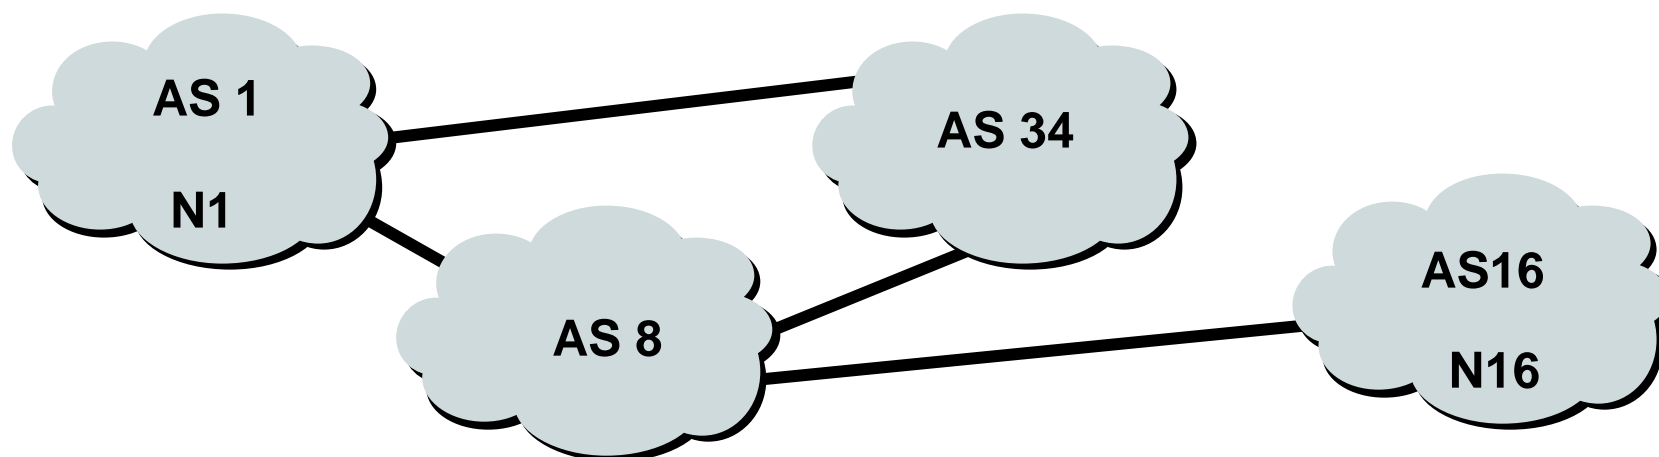


For net N1 in AS1 to send traffic to net N16 in AS16:

- AS16 must originate and announce N16 to AS8.
- AS8 must accept N16 from AS16.
- AS8 must announce N16 to AS1 or AS34.
- AS1 must accept N16 from AS8 or AS34.

For two-way packet flow, similar policies must exist for N1.

Routing Flow/Packet Flow: With multiple ASes

Cisco.com

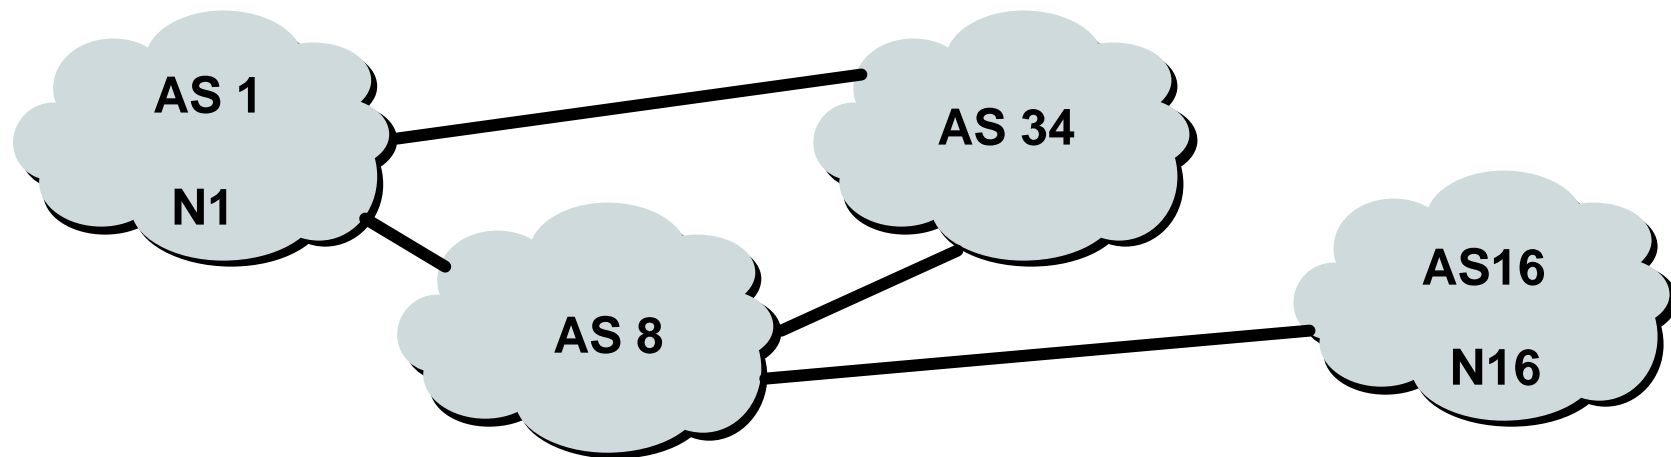

As multiple paths between sites are implemented it is easy to see how policies can become quite complex.

Routing Policy

Cisco.com

- **Used to control traffic flow in and out of an ISP network**
- **ISP makes decisions on what routing information to accept and discard from its neighbours**

Individual routes

Routes originated by specific ASes


Routes traversing specific ASes

Routes belonging to other groupings

Groupings which you define as you see fit

Routing Policy Limitations


Cisco.com

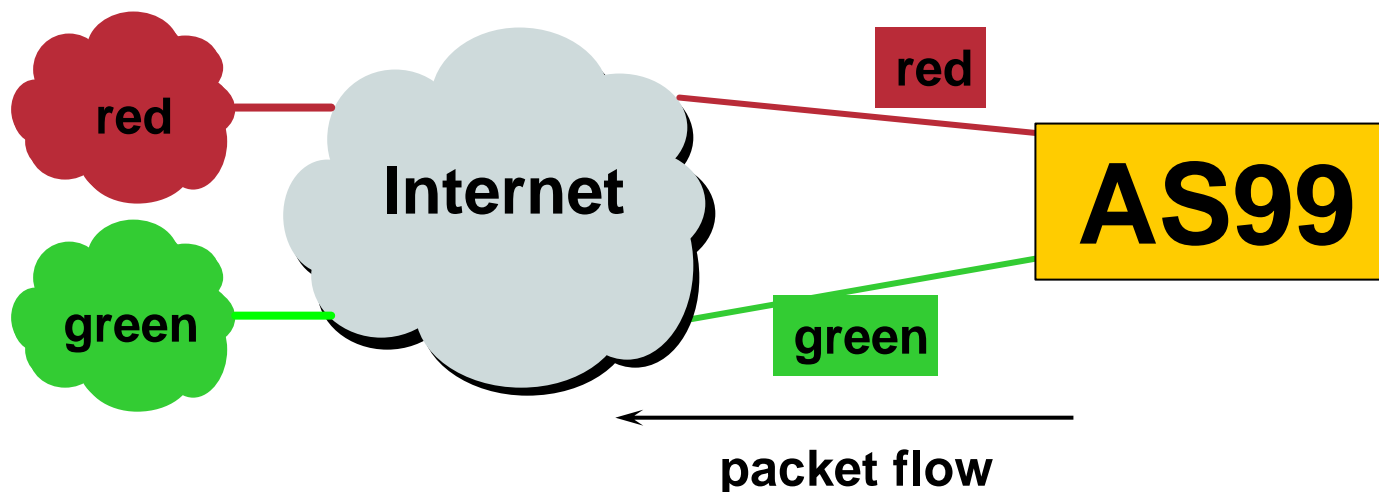

- **AS99 uses red link for traffic to the red AS and the green link for remaining traffic**
- **To implement this policy, AS99 has to:**
 - Accept routes originating from the red AS on the red link**
 - Accept all other routes on the green link**

Routing Policy Limitations

Cisco.com

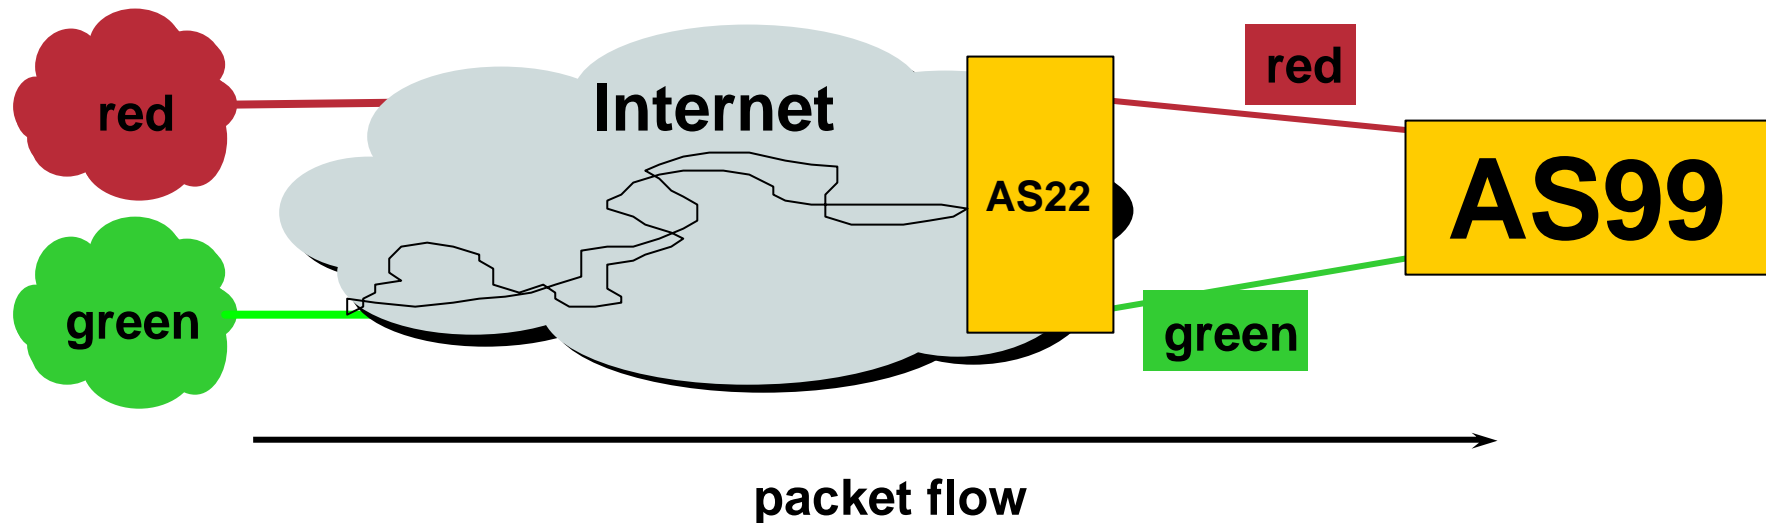

- **AS99 would like packets coming from the green AS to use the green link.**
- **But unless AS22 cooperates in pushing traffic from the green AS down the green link, there is very little that AS99 can do to achieve this aim**

Routing Policy Issues

Cisco.com

- **131000 prefixes (not realistic to set policy on all of them individually)**
- **16500 origin AS's (too many)**
- **routes tied to a specific AS or path may be unstable regardless of connectivity**
- **groups of AS's are a natural abstraction for filtering purposes**

Routing Protocols

We now know what routing means...

...but what do the routers get up to?

Routing Protocols

Cisco.com

- **Routers use “routing protocols” to exchange routing information with each other**

IGP is used to refer to the process running on routers inside an ISP's network

EGP is used to refer to the process running between routers bordering directly connected ISP networks

What Is an IGP?

Cisco.com

- **Interior Gateway Protocol**
- **Within an Autonomous System**
- **Carries information about internal infrastructure prefixes**
- **Examples – OSPF, ISIS, EIGRP**

Why Do We Need an IGP?

Cisco.com

- **ISP backbone scaling**

Hierarchy

Limiting scope of failure

**Only used for ISP's infrastructure addresses,
not customers**

Design goal is to **minimise number of prefixes
in IGP to aid scalability and rapid convergence**

What Is an EGP?

Cisco.com

- **Exterior Gateway Protocol**
- **Used to convey routing information between Autonomous Systems**
- **De-coupled from the IGP**
- **Current EGP is BGP**

Why Do We Need an EGP?

Cisco.com

- **Scaling to large network**
 - Hierarchy**
 - Limit scope of failure**
- **Define Administrative Boundary**
- **Policy**
 - Control reachability of prefixes**
 - Merge separate organizations**
 - Connect multiple IGPs**

Interior versus Exterior Routing Protocols

Cisco.com

- **Interior**

**automatic neighbour
discovery**

**generally trust your IGP
routers**

**prefixes go to all IGP
routers**

**binds routers in one AS
together**

- **Exterior**

**specifically configured
peers**

**connecting with outside
networks**

**set administrative
boundaries**

binds AS's together

Interior versus Exterior Routing Protocols

Cisco.com

- **Interior**

**Carries ISP
infrastructure
addresses only**

**ISPs aim to keep the
IGP small for efficiency
and scalability**

- **Exterior**


**Carries customer
prefixes**

Carries Internet prefixes

**EGPs are independent
of ISP network topology**

Hierarchy of Routing Protocols

Cisco.com

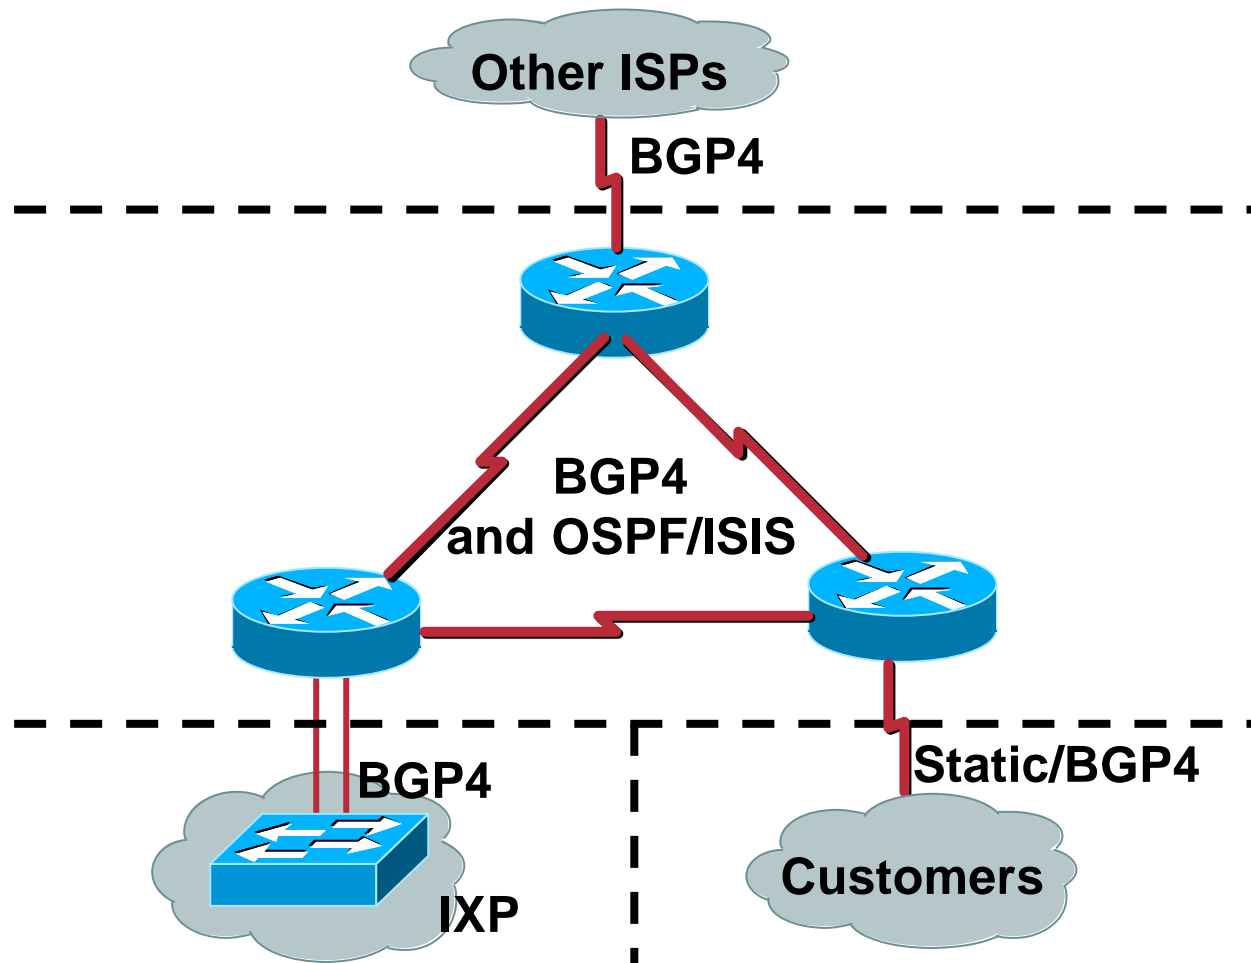

Default Administrative Distances

Cisco.com

Route Source	Default Distance
Connected Interface	0
Static Route	1
Enhanced IGRP Summary Route	5
External BGP	20
Internal Enhanced IGRP	90
IGRP	100
OSPF	110
IS-IS	115
RIP	120
EGP	140
External Enhanced IGRP	170
Internal BGP	200
Unknown	255

Routing Basics

ISP/IXP Workshops