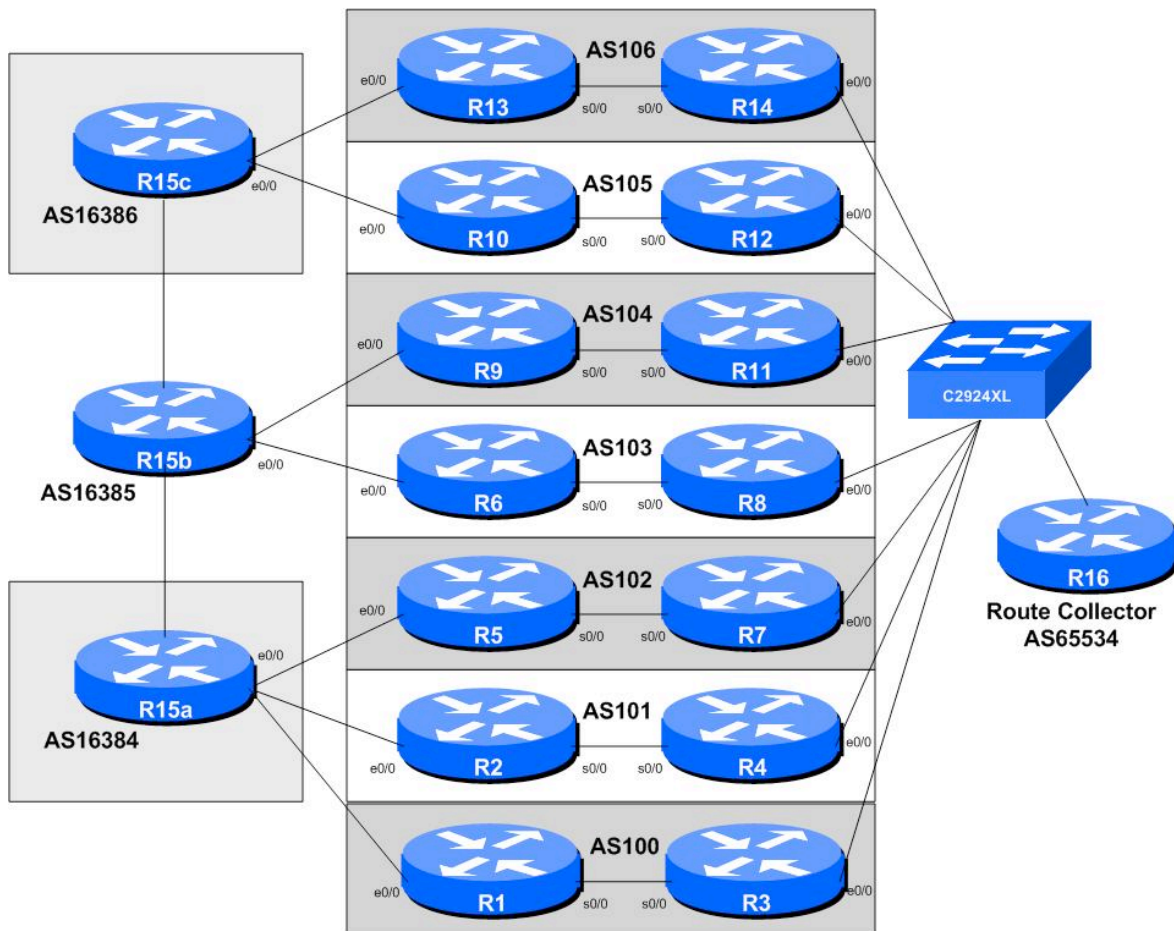


## Module 19 – An Internet Exchange Point

**Objective:** To investigate methods for connecting to an Internet Exchange Point.

**Prerequisites:** Modules 12, 13 and 18, and the Exchange Points Presentation



**Figure 1 – IXP Configuration**

### Lab Notes

The purpose of this module is to introduce the concept of an Internet Exchange Point, how to peer at IXPs, and look at some of the recommended configuration practices.

It has seven ASNs participating at the IX, with two routers being assigned to each autonomous system. One router peers at the IX, the other router is internal to the autonomous system (so will have an OSPF and iBGP session with the IX facing router). It also has three routers operating as three transit provider or Tier1 ISPs. This version of the module is incremental over Module 10 and covers correct OSPF and iBGP configuration practices for connecting the IXP facing router to the rest of the ISP network.

## Lab Exercises

1. **A More Advanced IXP.** This IXP example has seven participating ASNs with each ASN having two routers. One router peers at the IXP; the other router is internal to the ISP's network and connects to an upstream ISP. The two routers in each ASN present at the IXP use OSPF and iBGP to communicate routing information with the each other. The three upstream ASNs are also interconnected with each other, to represent the high speed Internet core. What we have done here is to simulate an Internet Exchange Point and its participants' connections to upstream ISPs.
2. **Basic Configuration.** Each router team should configure their router to fit into the network layout depicted in Figure 1. Check all connections. Note that all links to the IX switch are by Ethernet. The links between each router in each AS is by serial connection (to represent the WAN connection from the IX back to the ISP's core network). The links from each AS to their upstream is by Ethernet (to represent the WAN link to the upstream).
3. **Addressing Plan.** These address ranges should be used throughout this section of the module. You are welcome to use your own range within an AS if you desire, just so long as you consult with the teams in other ASes to ensure there is no overlap.

<b>AS100</b>	<b>100.1.0.0/20</b>	<b>AS105</b>	<b>100.6.96.0/20</b>
<b>AS101</b>	<b>100.2.16.0/20</b>	<b>AS106</b>	<b>100.7.112.0/20</b>
<b>AS102</b>	<b>100.3.32.0/20</b>	<b>AS16384</b>	<b>100.8.128.0/20</b>
<b>AS103</b>	<b>100.4.48.0/20</b>	<b>AS16385</b>	<b>100.9.144.0/20</b>
<b>AS104</b>	<b>100.5.64.0/20</b>	<b>AS16386</b>	<b>100.10.160.0/20</b>

4. **Basic Router Setup.** Set up the routers as you would have done in previous modules. That is, basic security, IP addressing etc. The addressing for the point to point link between the two routers in each AS is left as an exercise to the Router Teams. But remember, a point to point link requires a /30 address block. Don't forget to configure the loopback interfaces too.
5. **Management Router and IXP LAN.** The address range used for the IXP LAN is 120.5.10.0/24 – the route collector (if provided in this module) has an IP address of 120.5.10.254. Each of the ASes is assigned a block of 3 addresses to use on the exchange point LAN. So, for example, AS100 has 120.5.10.1, 120.5.10.2 and 120.5.10.3. AS101 has 120.5.10.4, 120.5.10.5 and 120.5.10.6. And so on.

**Q.** Why do you think three addresses have been assigned to each participant at the IXP?

6. **Configure the ethernet of each router at the IXP.** The ethernet interfaces connected to the IXP should be configured appropriately for a public connection. Review the IOS Essentials materials and the IXP presentation. The configuration for Router 3 might be:

```
interface ethernet 0/0
description Exchange Point LAN
ip address 120.5.10.1 255.255.255.0
no ip directed-broadcast
no ip proxy-arp
no ip redirects
!
```

If you are unclear as to what any of the configuration lines do, please ask the lab instructor.

**Checkpoint #4:** *When you have properly configured your router, and the other routers at the IXP are reachable (i.e. you can ping the other routers), please let the instructor know.*

- 7. Configuring OSPF (part 1).** Obviously each IXP team will need to configure OSPF between the two routers in their AS. The router which is internal to the ASN's network should be straightforward to configure. It has one loopback interface, one active interface pointing to the IXP facing router, and one interface pointing to the upstream. So OSPF should have three network statements, and one active interface configured. Example for Router 10 might be:

```
router ospf 105
 log-adjacency-changes
 network serial 0.0.0.3 area 0      ! link to Router 12
 network ethernet 0.0.0.3 area 0    ! link to Router 15c
 network loopback 0.0.0.0 area 0
 passive-interface default
 no passive-interface serial 0/0
!
```

- 8. Configuring OSPF (part 2).** The OSPF configuration on the IXP facing router needs more care. It is highly important that the IXP LAN network **does not** ever appear in the ISP's routing table, either in OSPF or in iBGP. If it does, there is the possibility of leaking the IX LAN network by the ISP's BGP to other ASNs, providing transit to the IXP. This might not be a good thing, and many IXPs have rules against this behaviour.

The OSPF configuration for the IXP router looks something like this, for example for Router 8:

```
router ospf 104
 log-adjacency-changes
 network serial 0.0.0.3 area 0      ! link to Router 6
 network loopback 0.0.0.0 area 0
 passive-interface default
 no passive-interface serial 0/0
!
```

**NB.** There is **NO** configuration for the Ethernet interface appearing in the OSPF configuration. Do **NOT** put any in, repeat, do **NOT**! It is **NOT** a mistake.

- 9. Information Only: Configuring iBGP on non-IXP facing routers.** There are only two routers per AS in this Module – this step only applies to iBGP peerings with routers other than the IXP router. The iBGP configuration on the internal routers is straightforward enough, and is as has been done in early workshop modules. For example, for Router 6:

```
router bgp 103
 no synchronization
 network 100.4.48.0 mask 255.255.240.0
 neighbor ibgp-peers peer-group
 neighbor ibgp-peers remote-as 103
 neighbor ibgp-peers update-source loopback0
 neighbor ibgp-peers password cisco
 neighbor ibgp-peers description iBGP peers
 neighbor ibgp-peers send-community
 neighbor router8-loopback peer-group ibgp-peers
```

```
no auto-summary
!  
ip route 100.4.48.0 255.255.240.0 null0  
!
```

- 10. Configuring iBGP between upstream facing routers and the IXP facing router.** Any router which is connected to other ASNs (the ISP border routers) such as the ISP's upstreams or ISP's peers needs to have a modified iBGP configuration when peering with the IXP facing router. If all the prefixes learned from the upstream ISP are passed onto the IXP facing router, then there is the possibility that the IXP peers (and non-peers) can point static routes for those destinations at the IXP facing router, thereby gaining outbound transit across the local ASN. This is undesirable, and is basically a security risk. The configuration in the previous step therefore needs to be modified for IXP facing routers (the only router in this lab module example) so that external prefixes are not announced to the IXP facing router. In real life, ISPs create a peer-group which is used only when peering with IXP-facing routers, for example:

```
router bgp 103  
no synchronization  
network 100.4.48.0 mask 255.255.240.0  
neighbor ibgp-ixp peer-group  
neighbor ibgp-ixp remote-as 103  
neighbor ibgp-ixp update-source loopback0  
neighbor ibgp-ixp password cisco  
neighbor ibgp-ixp description iBGP peering with IXP routers  
neighbor ibgp-ixp send-community  
neighbor ibgp-ixp filter-list 10 out  
neighbor router8-loopback peer-group ibgp-ixp  
no auto-summary  
!  
ip route 100.4.48.0 255.255.240.0 null0  
!  
ip as-path access-list 10 permit ^$  
!
```

Note the addition of the as-path access-list 10 – this basically allows only locally originated prefixes to reach the IX facing router. For example, Router8 with this configuration will now no longer send externally learned prefixes to Router6, thereby guaranteeing the security of the AS100 network.

- 11. Configuring iBGP on IXP facing routers (Part 1).** The iBGP configuration on the IXP facing router needs much more care. We do **NOT** want the IXP LAN to appear in our iBGP. And because the IXP LAN is not in OSPF, we can't use this net for valid next-hops. So that BGP has a valid next-hop, we introduce the `next-hop-self` BGP configuration. This changes the iBGP default by changing the next-hop address for external sites from the external neighbour address to the loopback address of the local router. The local router knows how to get to the external destinations because it is connected to the LAN that leads there – the rest of the network internal to the AS is told simply to go via this router.

Introducing next-hop-self changes the `ibgp-peers peer-group` as follows, for example, for Router 7:

```
router bgp 102  
no synchronization  
neighbor ibgp-peers peer-group  
neighbor ibgp-peers remote-as 102
```

```

neighbor ibgp-peers update-source loopback0
neighbor ibgp-peers next-hop-self          ! set external next-hops to us
neighbor ibgp-peers password cisco
neighbor ibgp-peers descr iBGP peers
neighbor ibgp-peers send-community
neighbor router5-loopback peer-group ibgp-peers
no auto-summary
!
```

**12. Configuring iBGP on IXP facing routers (Part 2).** The second important difference required for the iBGP at the IXP router is that the local address block must **NOT** be originated here. If the IX router is disconnected from the core backbone for whatever reason, if it originated the ISP's address block, it would end up blackholing all traffic from the IXP participants to the local network. This is highly undesirable, so the correct procedure is to originate the ISP address block only in the core of the network, not the edge, so that normal BGP failover rules can apply.

**Q.** What do you think the normal BGP failover rules might be in this case?

**A.** If the IXP facing router is disconnected from the core network, the iBGP fails, the OSPF fails. So the router no longer hears the announcement of the ISP's address block from the core, so no longer announces it to the IXP peers, its eBGP neighbours. When this happens, the other ASNs will use fall back paths (alternative to the IXP) to reach the local ASN. These are the normal BGP failover rules.

**13. Configuring iBGP on the IXP facing routers (Part 3).** The second very important requirement at an Internet exchange point is that a default route (or the routes not originated by the local ASN) should not be made available at the peering LAN. If this requirement is not followed, then it is possible for the Exchange Point participants to use the local network to get transit to the rest of the Internet.

In this Module, each ASN will be receiving a default route from their upstream provider (a common scenario in the Internet today). This default route must **NOT** be made available at the ISP's Exchange Point router. There are two ways to do this. Either block the announcement of the default route by iBGP at the borders router which connect to the upstreams, or set up a static default route to the Null interface at the IXP router (or indeed do both!). For example:

```
ip route 0.0.0.0 0.0.0.0 null0
```

Then if any of the IXP participants point a default route to the local network, the traffic will simply be dumped in the Null interface of their IXP router. Only traffic for specific destinations which are available in the routing table on the IXP router will be forwarded to the rest of the network. This is a very important **network security** requirement.

**14. Configuring eBGP on the IXP facing routers.** Next, eBGP needs to be set up on the IXP routers. Create a peer-group and apply that peer-group to each eBGP neighbour. A sample configuration for Router8 might be:

```

ip prefix-list myprefixes permit 100.4.48.0/20
ip prefix-list peer100 permit 100.1.0.0/20
..
ip prefix-list peer106 permit 100.7.112.0/20
!
```

```
router bgp 103
  no synchronization
  bgp log-neighbor-changes
  neighbor ixp-peers peer-group
  neighbor ixp-peers remove-private-AS
  neighbor ixp-peers prefix-list myprefixes out
  neighbor ixp-peers route-map set-local-pref in
  neighbor <router3> remote-as 100
  neighbor <router3> description Peering with AS100
  neighbor <router3> peer-group ixp-peers
  neighbor <router3> prefix-list peer100 in
..
  neighbor <router14> remote-as 106
  neighbor <router14> description Peering with AS106
  neighbor <router14> peer-group ixp-peers
  neighbor <router14> prefix-list peer106 in
  no auto-summary
!
route-map set-local-pref permit 10
  set local-preference 150
!
```

The configurations for the other routers will be similar to this one. All router teams will have done sufficient BGP configuration throughout this workshop to extrapolate from the above examples. If in any doubt, ask the lab demonstrator for assistance.

Note the prefix-lists. There is a per-peer inbound prefix-list. Some service providers only filter ASes – that has inherent dangers, and does not prevent against inbound leaking of prefixes incorrectly originated by the peer AS. But only filtering on prefixes doesn't scale, especially in larger IXPs with large participating service providers as they are frequently adding to the prefixes they announce. The Internet Routing Registry is usually used to solve this problem.

- 15. Set up passwords on the eBGP sessions at the IXP.** Negotiate with each ASN a password which you can use on your BGP session with them. And then agree to cut the eBGP session over to using passwords such that the eBGP session does not fall over due to password mismatches (as in Module 2). An excerpt from Router 8's configuration might be:

```
router bgp 103
...
neighbor <router11> password peer104
...
!
```

- 16. Configuring eBGP between the routers in AS16384, AS16385 and AS16386.** The instructors will operate the three transit/Tier1 ASNs; they will now configure eBGP between each other. No filtering is expected or required between the three ASNs, so the eBGP configuration is quite straightforward, for example as on Router 15a:

```
router bgp 16384
  no synchronization
  bgp log-neighbor-changes
  neighbor <router15b> remote-as 16385
  neighbor <router15b> password as16385-password
  neighbor <router15b> description Peering with AS16385
  no auto-summary
```

!

- 17. Configuring eBGP with the routers in AS16384, AS16385 and AS16386.** All IXP members must now configure eBGP sessions with the routers in the three transit ASNs. They must expect to receive the default route from their upstreams, and only send their address block to the upstream. An example configuration for Router 2 might be:

```
ip prefix-list myprefixes permit 100.2.16.0/20
!
router bgp 101
no synchronization
bgp log-neighbor-changes
neighbor <router15a> remote-as 16384
neighbor <router15a> description Peering with AS16384
neighbor <router15a> password as16384-password
neighbor <router15a> prefix-list default in
neighbor <router15a> prefix-list myprefixes out
no auto-summary
!
```

- 18. Connectivity Test.** Check connectivity throughout the IXP network. Each router team should be able to see all the other routers at the IXP. When you are satisfied that BGP is working correctly, try running traceroutes to check the paths being followed.

**Q.** Why do the traceroutes from one ASN to another ASN across the IXP show the middle hop as being star'ed out?

```
Router9#trace 100.7.112.1

 1 100.5.64.6 4 msec 4 msec 4 msec
 2 * * *
 3 100.7.112.1 [AS 106] 4 msec * 4 msec
Router9#
```

**Checkpoint #5:** Once the BGP configuration has been completed, check the routing table and ensure that you have complete reachability over the entire network. If there are any problems, work with the other router teams to resolve those.

- 19. (OPTIONAL) Set up eBGP session with Router 16.** The lab instructors will have configured Router 16 to be a route collector. This is a router which collects all the routes available at the IX. It serves purpose other than to be an information repository showing how many routes are available at the IX – quite often the IXP management will operate such a router, connected to a Looking Glass web interface, to increase the marketing value of the IX. The more peers who get attracted by the routes available at the IX, the greater the value proposition the IX is to the rest of the members. It's in everyone's interest to peer with the router collector:

```
router bgp 103
...
neighbor 120.5.10.254 remote-as 65534
neighbor 120.5.10.254 description eBGP with the IX Route Collector
neighbor 120.5.10.254 password ixp-collector
neighbor 120.5.10.254 remove-private-AS
```

```
neighbor 120.5.10.254 prefix-list deny-all in
neighbor 120.5.10.254 prefix-list myprefixes out
...
!
ip prefix-list deny-all deny 0.0.0.0/0 le 32
...
```

Notice that the route collector is running in a private AS – there isn't really any need for it to use a public AS as the Collector does not need to be directly visible outside of the IXP.

Note also the inbound prefix filter blocking all prefixes on the eBGP session with the Route Collector. The Collector will not advertise any prefixes, by design. However, ISPs should never trust any other AS or its operator, so the inbound prefix filter is provided for safety, just in case of problems at the Route Collector.

**20. Connectivity Test.** Check connectivity throughout the IXP network. Each router team should be able to see all the other routers at the IXP. When you are satisfied that BGP is working correctly, try running traceroutes to check the paths being followed.

**21. Completed!** The IXP is now complete, up and running. The lab instructors will log into the route collector and show the prefixes visible. All 6 announcements should be clearly seen in the output of *sh ip bgp* on the route collector.

**Checkpoint #3:** Compare your BGP routing table with that you see on the route collector. If you have missing prefixes, or some other problems, ask the lab demonstrators.

**22. Summary.** This module has given example configurations as used by Internet Service Providers at Internet Exchange Points. It has concentrated on using prefix-lists only – more sophisticated configurations are possible by using as-path filters and BGP communities. These examples are left to the reader to consider. If there is time at the end of the workshop, ask the Instructor to test out some other scenarios.



## ***CONFIGURATION NOTES***

Documentation is critical! You should record the configuration at each ***Checkpoint***, as well as the configuration at the end of the module.