

# (Ab)Using Route Servers

Elisa Jasinska <[elisa.jasinska@ams-ix.net](mailto:elisa.jasinska@ams-ix.net)>

Chris Malayter <[cmalayter@switchanddata.com](mailto:cmalayter@switchanddata.com)>

# Agenda

- Why Route Servers?
- What do Route Servers do?
- Current implementations and Route Server Working Group
- Functionality and scalability testing

# Agenda


- Why Route Servers?
- What do Route Servers do?
- Current implementations and route Server Working Group
- Functionality and scalability testing

# Why Route Servers?

- Internet Exchange (e.g. AMS-IX, DE-CIX, LINX)
- Peering Platform for many Parties
- Route Servers for the Participants


# Why Route Servers?

- Peer with as many parties as possible
- ➔ Maintaining lots of BGP Sessions

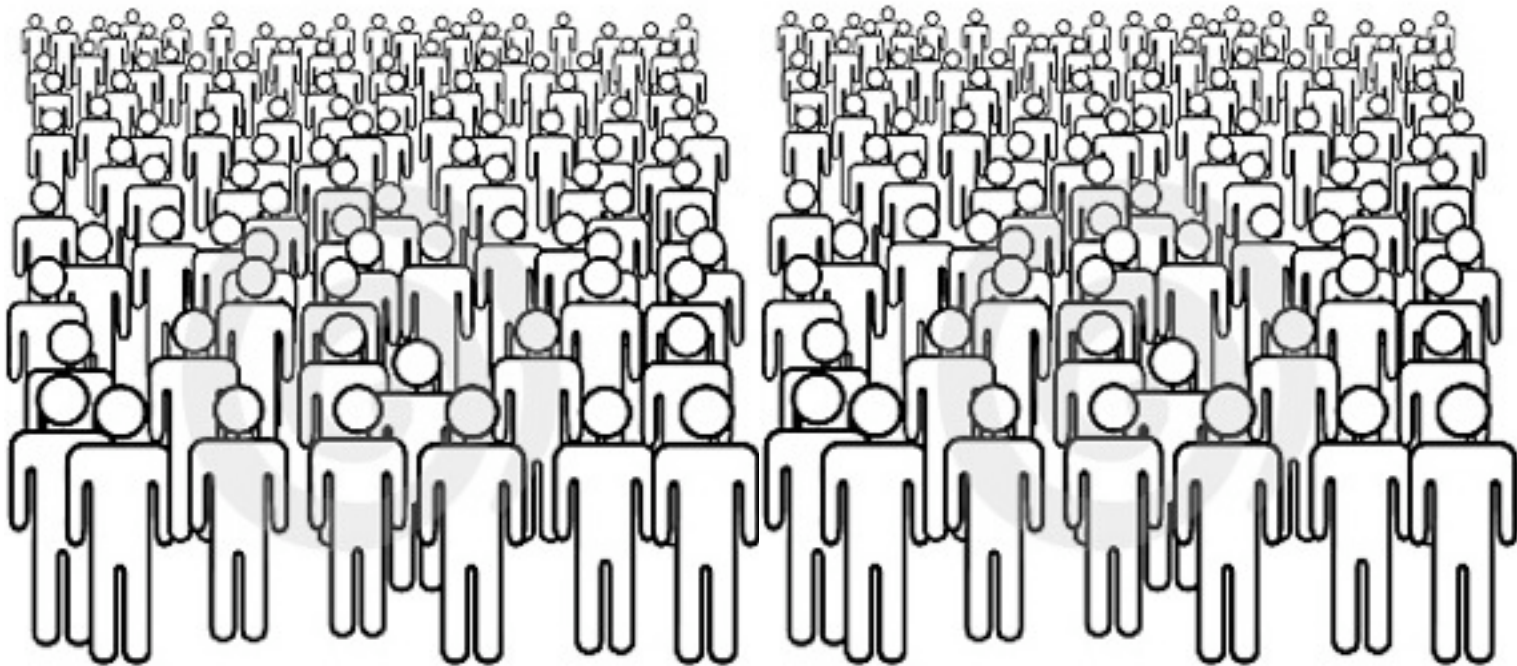

# Why Route Servers?

- Reach a lot of Parties with just one BGP session

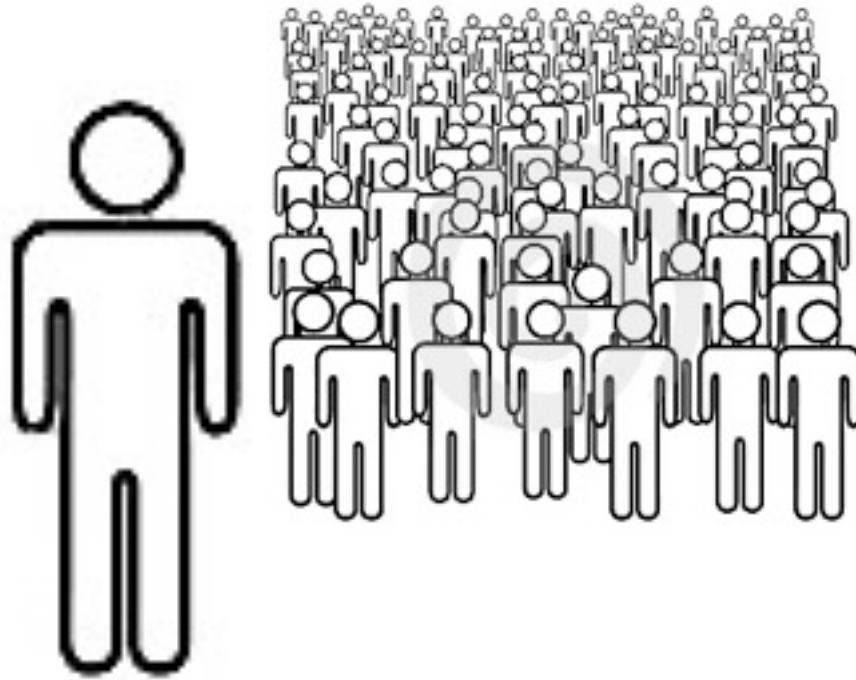


# Why Route Servers?

- Redundancy ... in case your sessions die ...



# Why Route Servers?


- Redundancy ... in case the Route Server dies ...

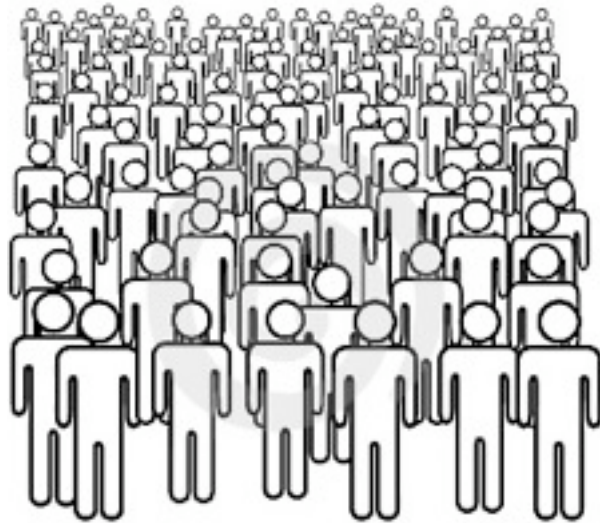



# Why Route Servers?

- Easy entry point for new Members to the Exchange - immediate traffic

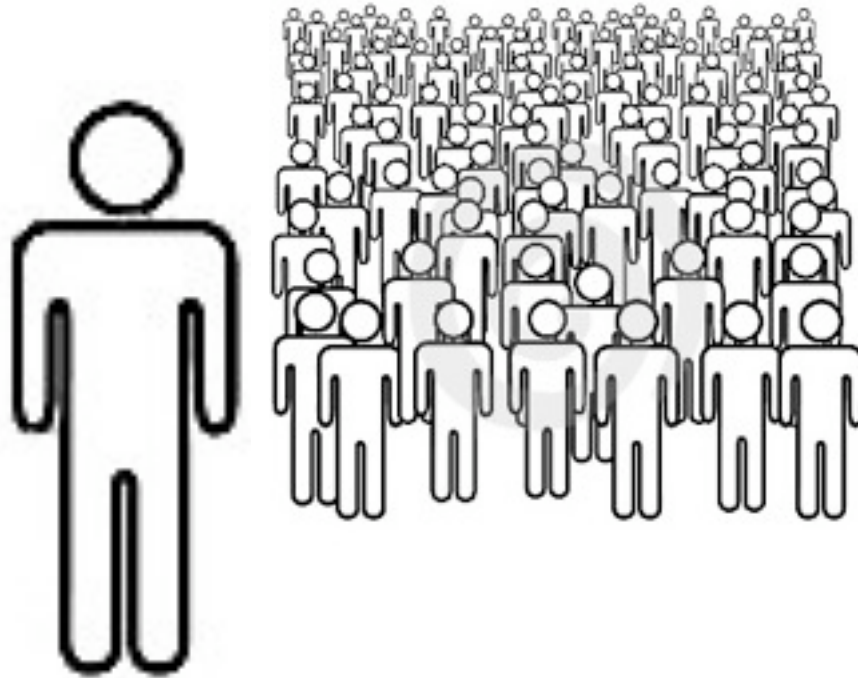

# Agenda

- Why Route Servers?
- **What do Route Servers do?**
- Current implementations and route Server Working Group
- Functionality and scalability testing

# What do route servers do?

- Receive UPDATES from every participant

```
19:58:33.721679 IP (tos 0x0, ttl 64, id 44576, offset 0, flags [DF], proto TCP (6), length 117)
10.23.0.5.58880 > 10.23.0.1.179: P, cksum 0xb892 (correct), 48:113(65) ack 61 win 1460
<nop,nop,timestamp 1976783474 3177206804>: BGP, length: 65
  Update Message (2), length: 65
```

```
...
  AS Path (2), length: 10, Flags [T]: 65499 11 12 13
```

```
...
  Next Hop (3), length: 4, Flags [T]: 10.23.0.5
```

```
...
  Updated routes:
    2.0.5.0/24
```

```
19:58:33.723897 IP (tos 0x0, ttl 64, id 42762, offset 0, flags [DF], proto TCP (6), length 117)
10.23.0.4.33349 > 10.23.0.1.179: P, cksum 0xb033 (correct), 48:113(65) ack 61 win 1460
<nop,nop,timestamp 1976783474 1916183085>: BGP, length: 65
  Update Message (2), length: 65
```

```
...
  AS Path (2), length: 10, Flags [T]: 65500 11 12 13
```

```
...
  Next Hop (3), length: 4, Flags [T]: 10.23.0.4
```

```
...
  Updated routes:
    2.0.4.0/24
```

# What do route servers do?

- Apply filters for the receiving peers

```
from AS65500 accept ANY  
to AS65500 announce AS65499
```

```
from AS65499 accept ANY  
to AS65499 announce AS65500
```

# What do route servers do?

- Perform “best path” selection for every peer
- Store Routing Information Base (RIB) for every peer

```
flags destination          gateway          lpref    med aspath origin
*>    2.0.4.0/24            10.23.0.4       100     200 65500 11 12 13 i
*>    2.0.5.0/24            10.23.0.5       100     200 65499 11 12 13 i
```

# What do route servers do?

- Forward the RIB contents to the desired peer

```
19:58:33.901718 IP (tos 0xc0, ttl 1, id 15745, offset 0, flags [DF], proto TCP (6), length 103)
10.23.0.1.179 > 10.23.0.4.33349: P, cksum 0x2b21 (correct), 61:112(51) ack 114 win 17376
<nop,nop,timestamp 1916183105 1976783474>: BGP, length: 51
  Update Message (2), length: 51
```

```
...
  AS Path (2), length: 10, Flags [T]: 65499 11 12 13
```

```
...
  Next Hop (3), length: 4, Flags [T]: 10.23.0.5
```

```
...
  Updated routes:
    2.0.5.0/24
```



```
19:58:33.903463 IP (tos 0xc0, ttl 1, id 12268, offset 0, flags [DF], proto TCP (6), length 103)
10.23.0.1.179 > 10.23.0.5.58880: P, cksum 0x377e (correct), 61:112(51) ack 114 win 17376
<nop,nop,timestamp 3177206824 1976783474>: BGP, length: 51
  Update Message (2), length: 51
```

```
...
  AS Path (2), length: 10, Flags [T]: 65500 11 12 13
```

```
...
  Next Hop (3), length: 4, Flags [T]: 10.23.0.4
```

```
...
  Updated routes:
    2.0.4.0/24
```

# What do route servers do?

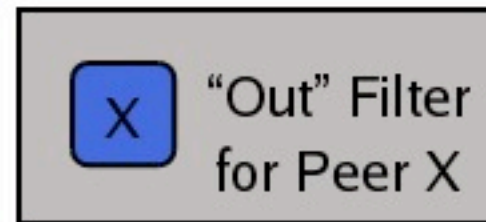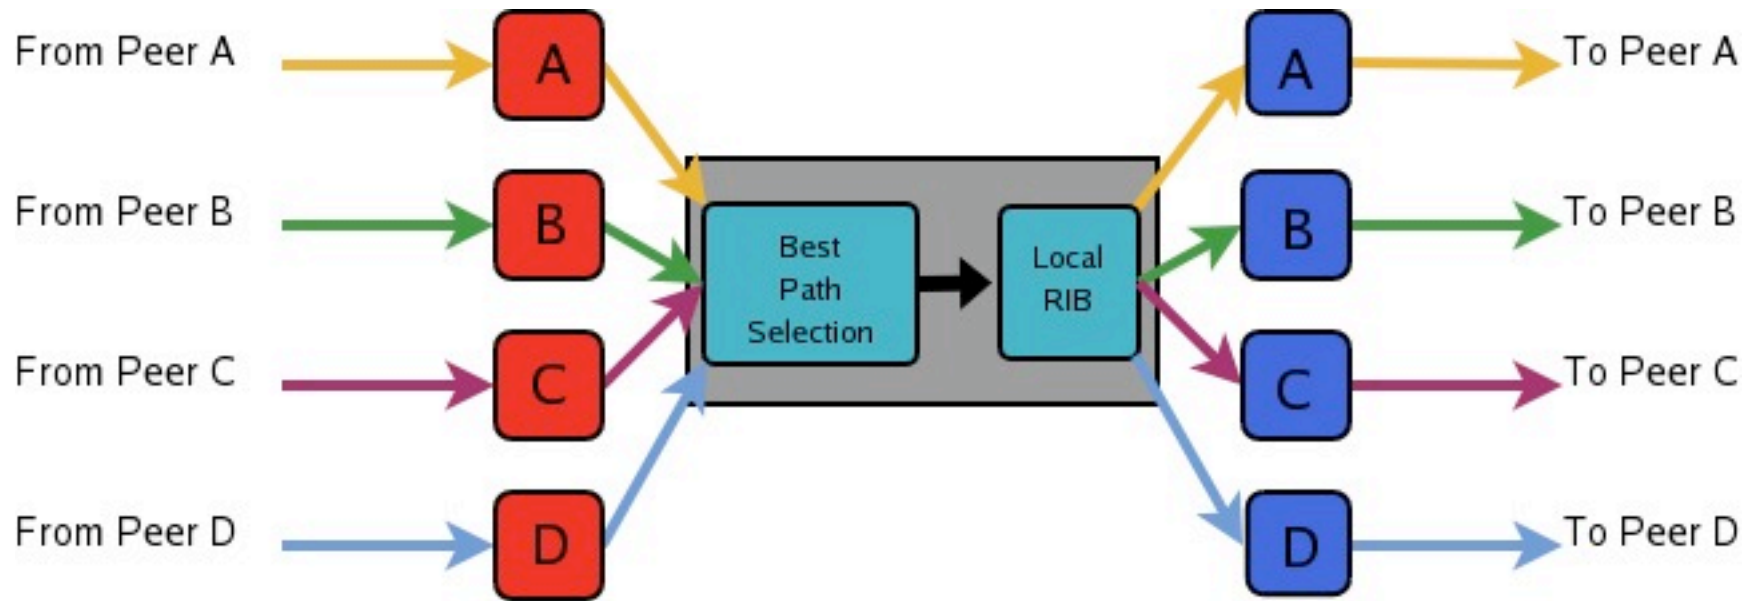

# Agenda

- Why Route Servers?
- What do Route Servers do?
- **Current implementations and Route Server Working Group**
- Functionality and scalability testing



# Current Implementations

- Quagga
- OpenBGPD
- BIRD

# Route Server Working Group

- Andy Davidson - LONAP
- Chris Malayter - Switch & Data
- Elisa Jasinska - AMS-IX
- Mo Shivji - LINX
- Robert Wozny - PL-IX
- Sebastian Spies - DE-CIX
- Wolfgang Hennerbichler - VIX



# Agenda

- Why Route Servers?
- What do Route Servers do?
- Current implementations and route Server Working Group
- **Functionality and scalability testing**

# Functional Testing

# AS4 / 32 Bit ASN

- All three implementations support AS4
- All three versions tested as of 12/4/2009 to properly implement AS4

# IPv6

- All three implementations support IPv6
- We highly recommend running a current version of any of three implementations
- MANY bugs fixed between 10/1/2009-1/1/2010
- Running a port of a route server is ill-advised and can leave a bad taste in your mouth!

# Scalability

# Testing

- 100 sessions, set up from IXIA
- 500 or 1000 prefixes per session
- Additional random flapping




# Quagga

- Single threaded implementation
- Issues with performing its tasks on time
- CPU thrashing during periods of instability
- Bug causing crash during flapping

# Quagga CPU


Quagga cpu usage  
multiple-rib; 100 sessions  
IXIA vs. Quagga  
500 prefixes per session with random flapping  
lab4  
2 x Intel(R) Xeon(R) CPU 3050 @ 2.13GHz

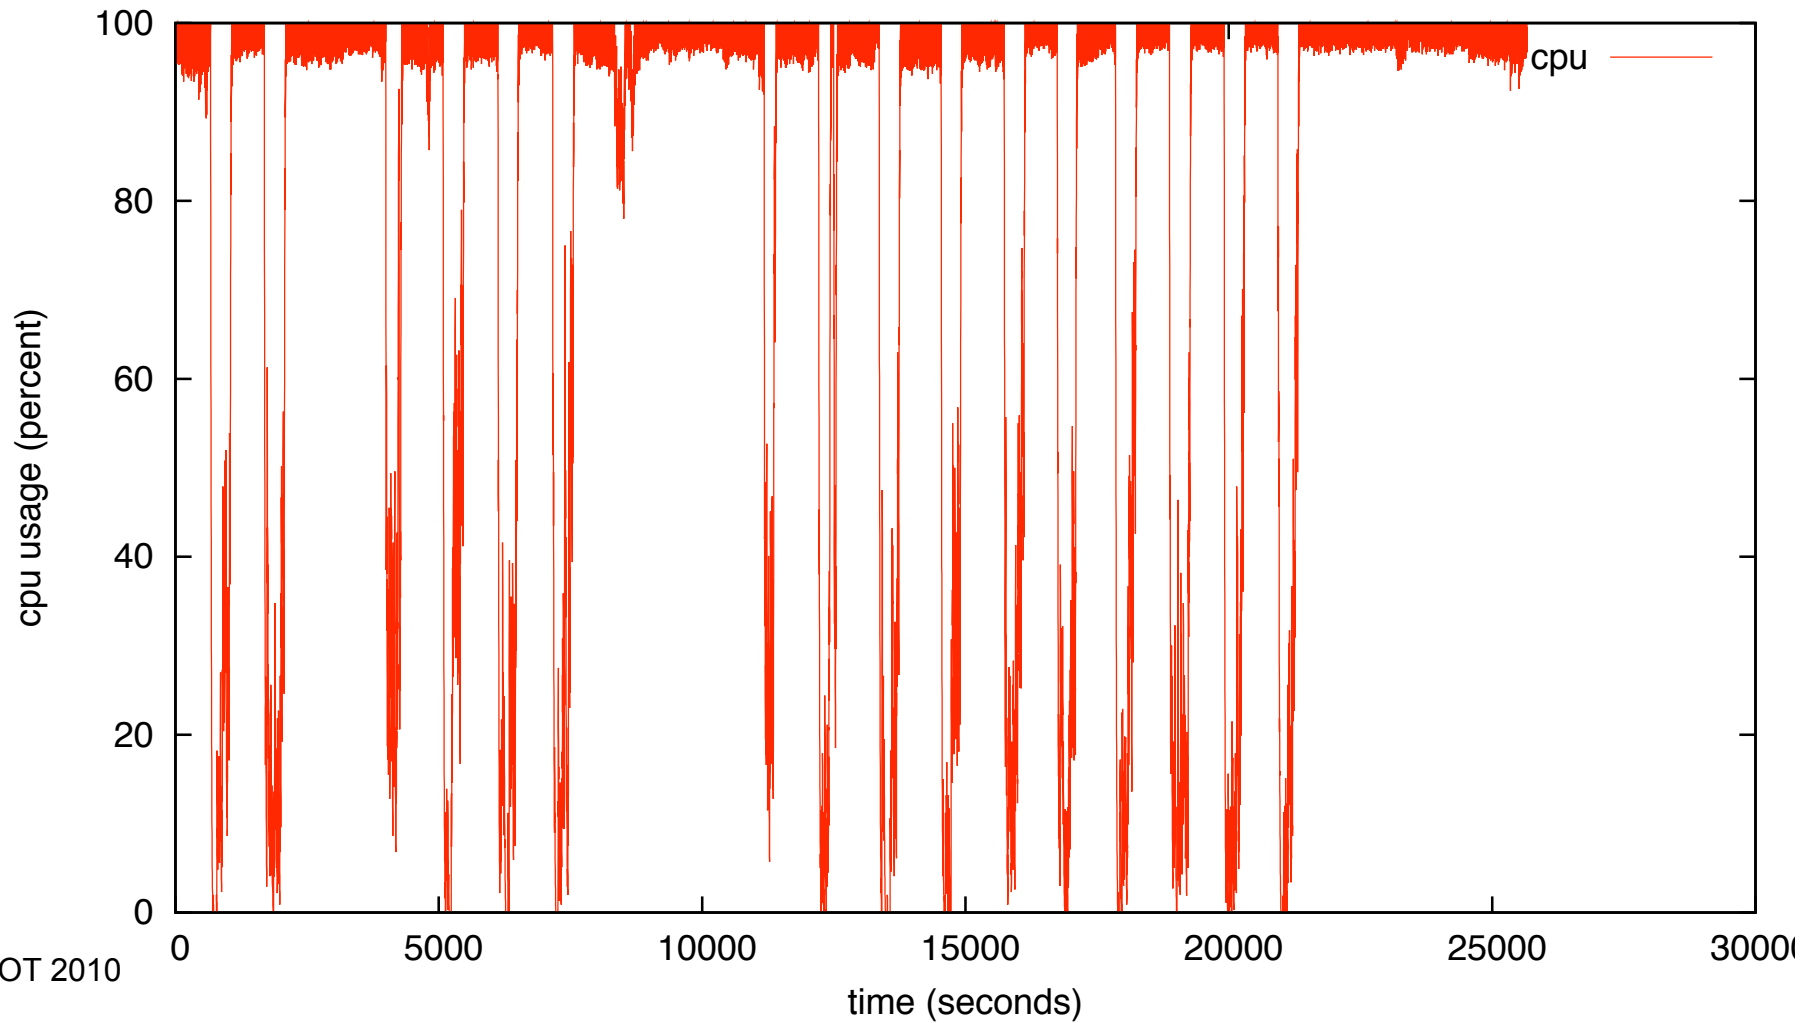

# OpenBGPd CPU


OpenBGPd cpu usage  
multiple-rib; 100 sessions  
IXIA vs. OpenBGPd  
1000 prefixes per session  
lab2.paix.net

4 x Intel(R) Xeon(TM) CPU 3.60GHz (GenuineIntel 686-class) 3.61 GHz

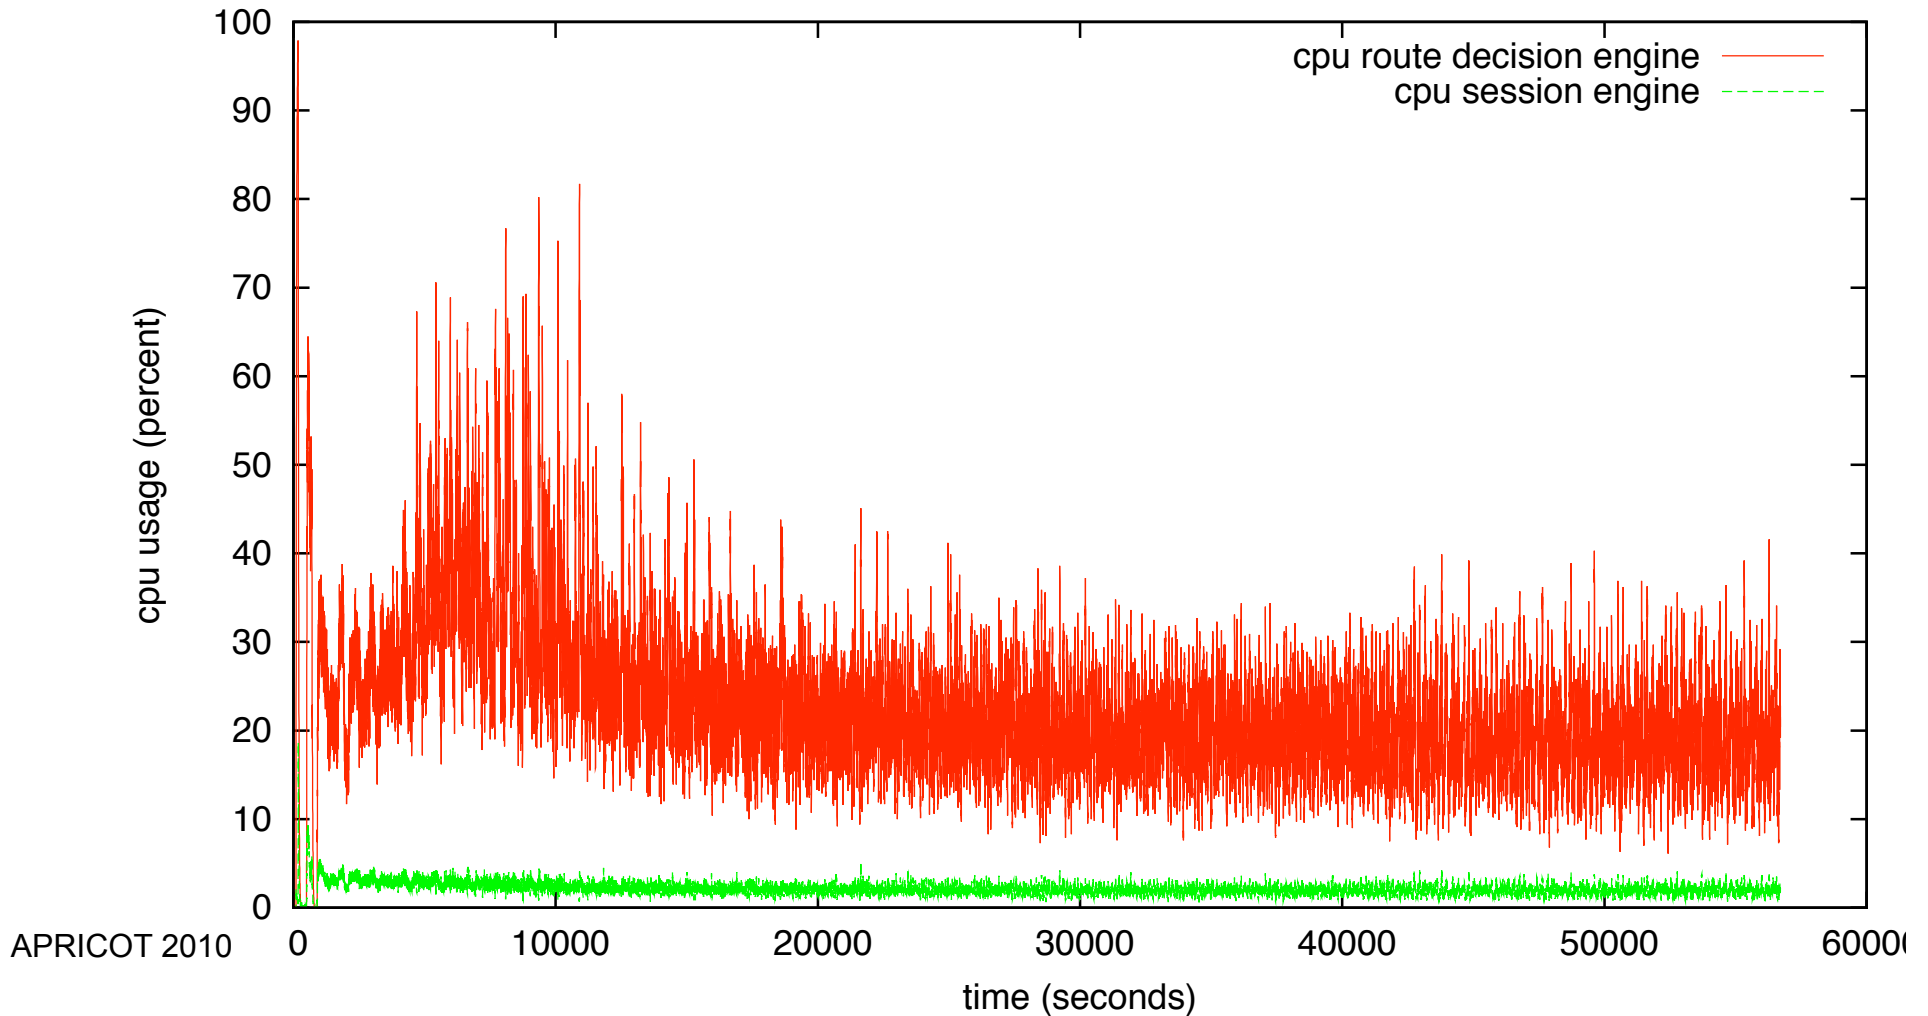

# BIRD CPU

BIRD cpu usage  
multiple-rib; 100 sessions  
IXIA vs. BIRD  
500 prefixes per session with random flapping  
lab6.paix.net  
4 x Intel(R) Xeon(TM) CPU 3.80GHz

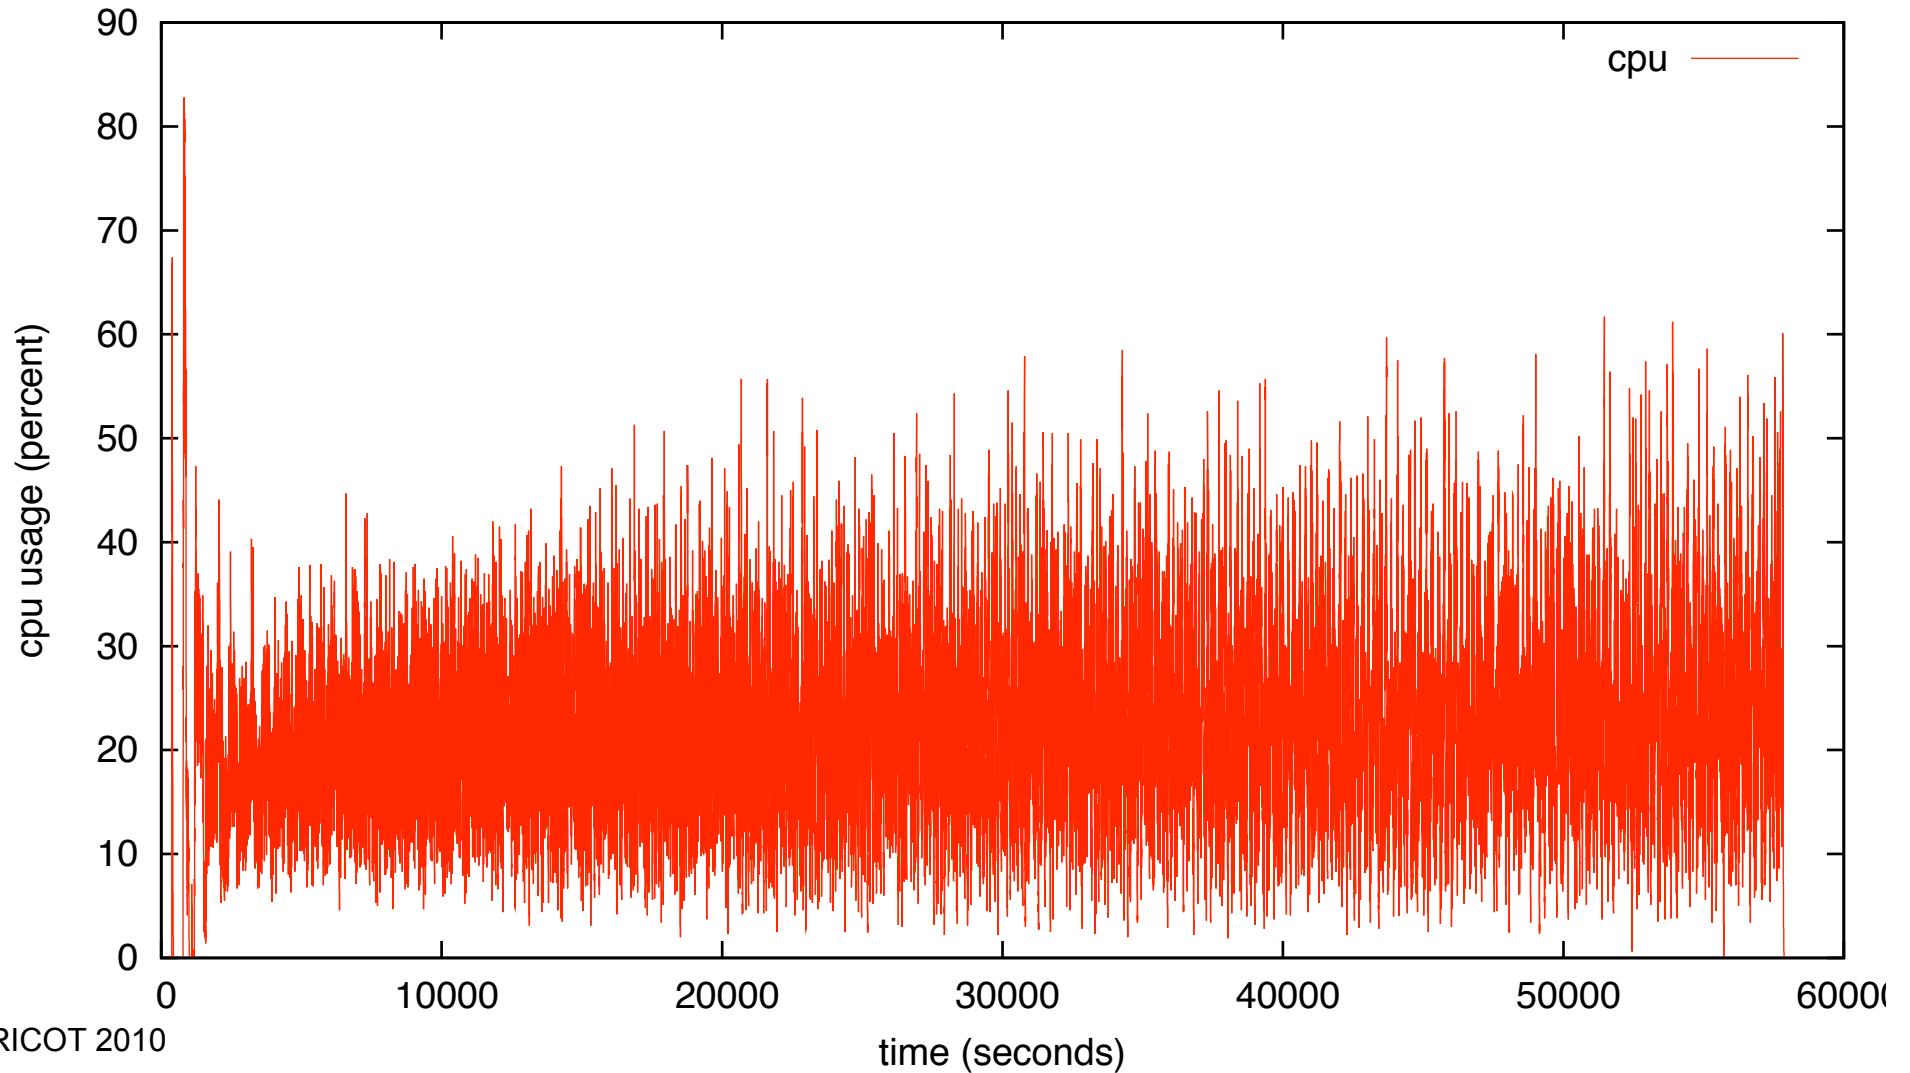


# OpenBGPD

- Multi-threaded implementation
- Session thread keeps sessions active while instability is occurring
- 1GB memory limitation per process on i386 and a 4 GB memory limitation on amd64

# OpenBGPD Mem


OpenBGPd mem usage  
multiple-rib; 100 sessions  
IXIA vs. OpenBGPD  
1000 prefixes per session  
lab2.paix.net

4 x Intel(R) Xeon(TM) CPU 3.60GHz (GenuineIntel 686-class) 3.61 GHz

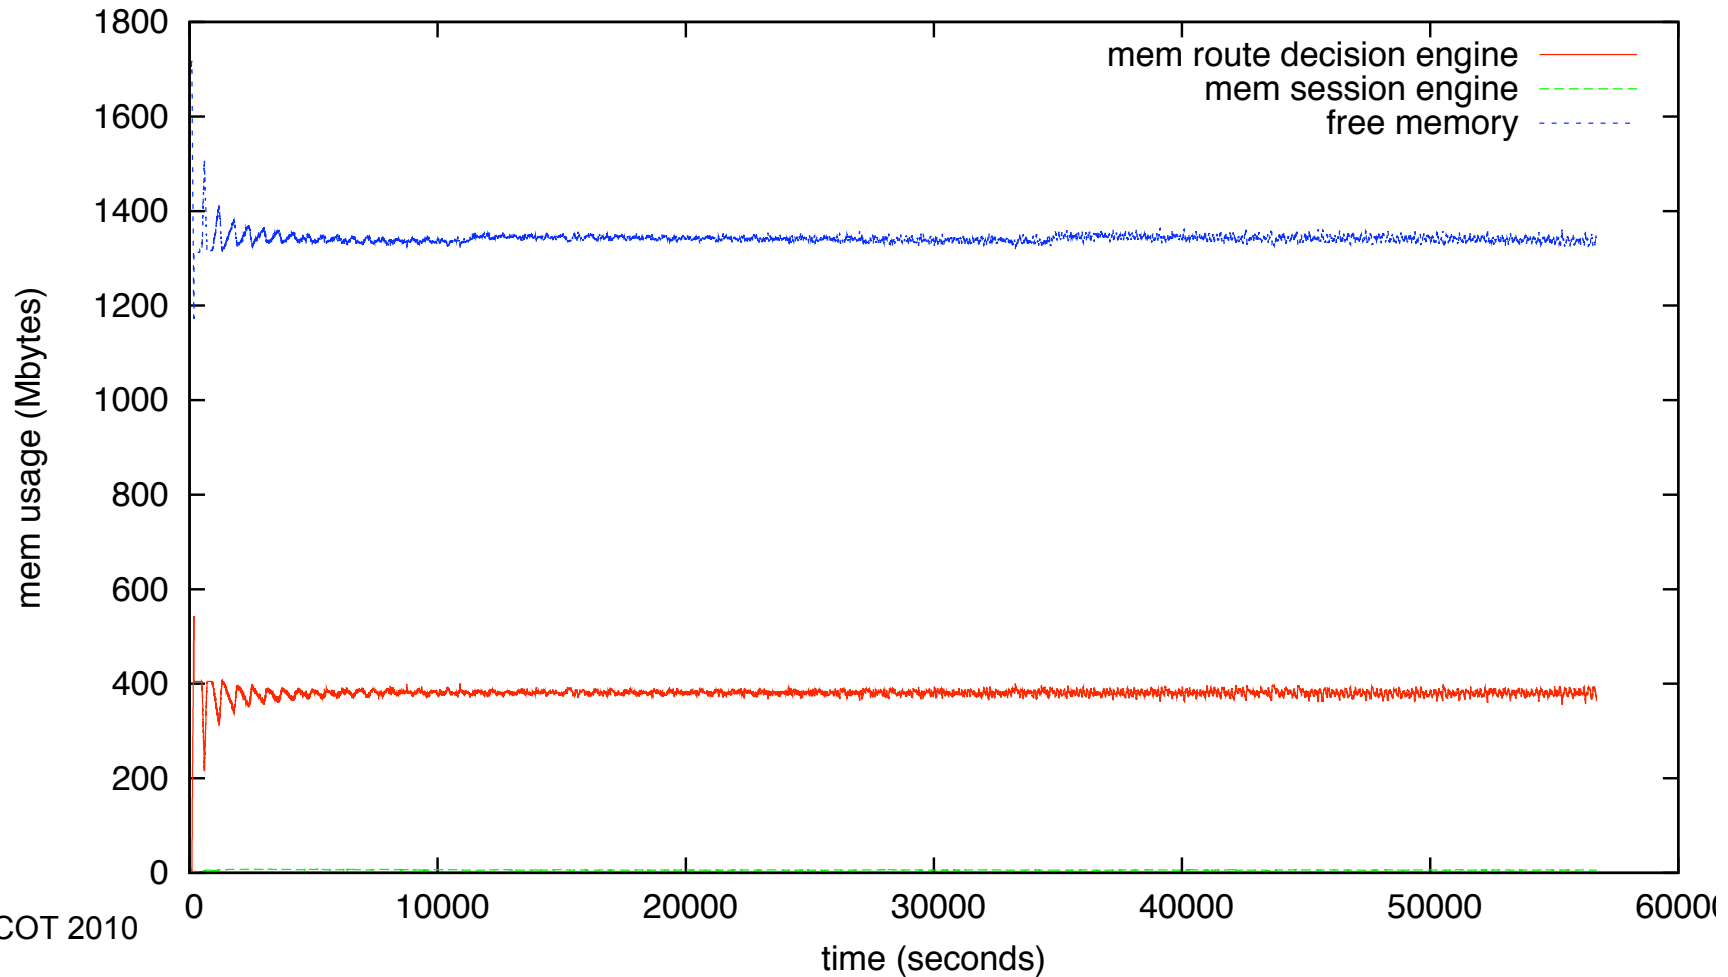

# Quagga Mem

Quagga mem usage  
multiple-rib; 100 sessions  
IXIA vs. Quagga  
500 prefixes per session with random flapping  
lab4  
2 x Intel(R) Xeon(R) CPU 3050 @ 2.13GHz

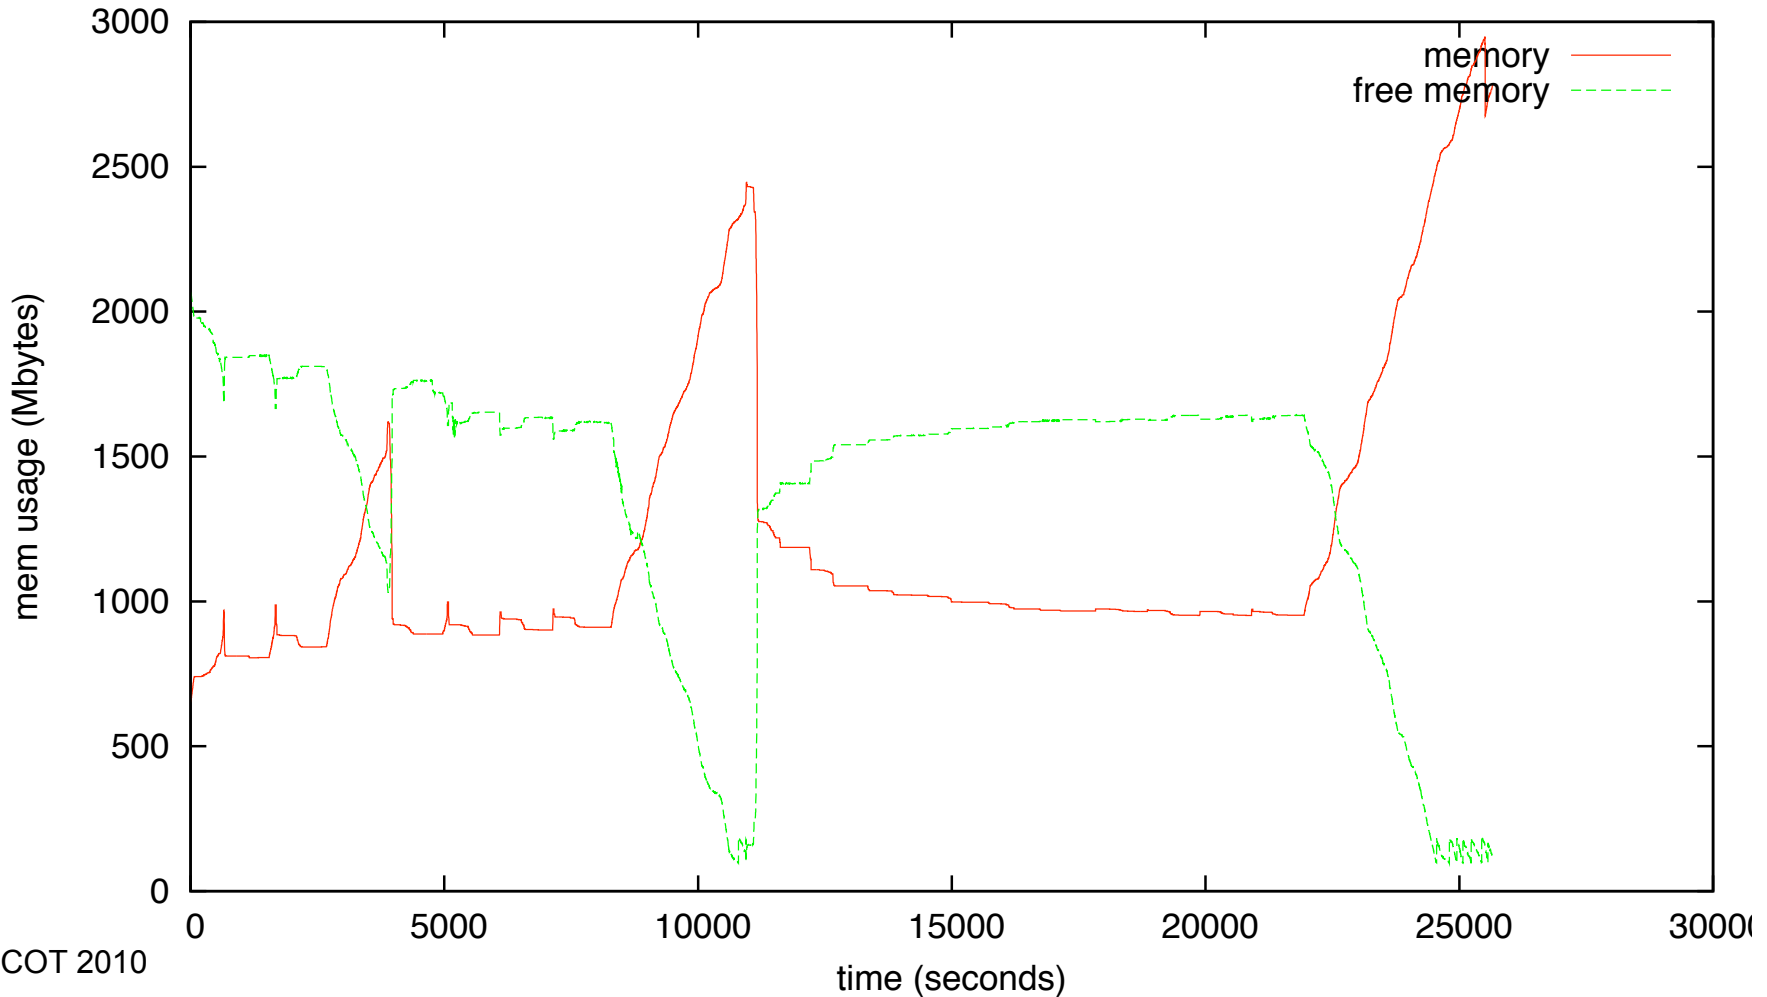


# BIRD

- Single threaded implementation
- Amazing scheduling system
- The most stable route server we tested
- Discovered odd memory freeing issues in Linux glibc



# BIRD Mem

BIRD mem usage  
multiple-rib; 100 sessions  
IXIA vs. BIRD  
500 prefixes per session with random flapping  
lab6.paix.net  
4 x Intel(R) Xeon(TM) CPU 3.80GHz

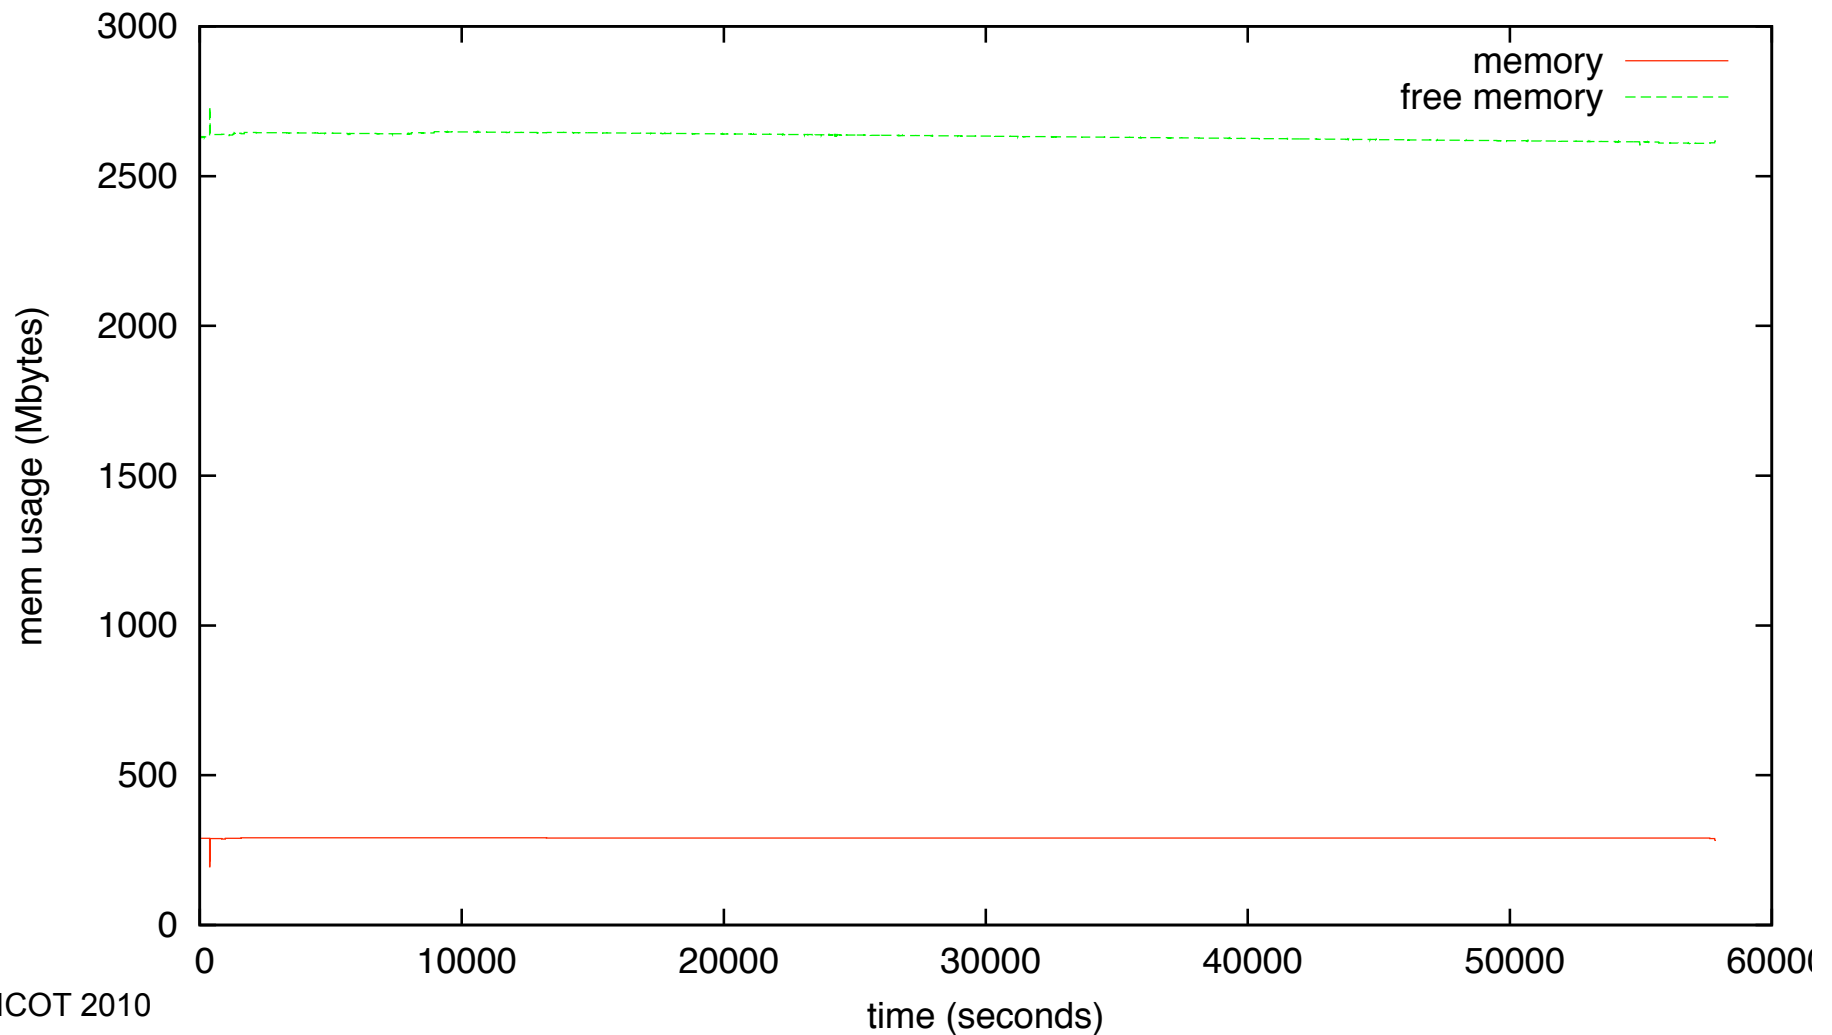

Thank you!  
Questions?

<elisa.jasinska@ams-ix.net>  
<cmalayer@switchanddata.com>